

PD-AB15/ PD-AW15

2700K 3000K 3500K 4000K 5000K 5700K


>30.000
Hours

220-240
VAC

RoHS

CE

White
Black

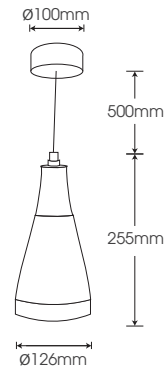


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PD-AB15/ PD-AW15	15W	CREE (USA)	50°	3000K	>80	1655lm
				4000K	>80	1850lm
				5000K	>80	1850lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

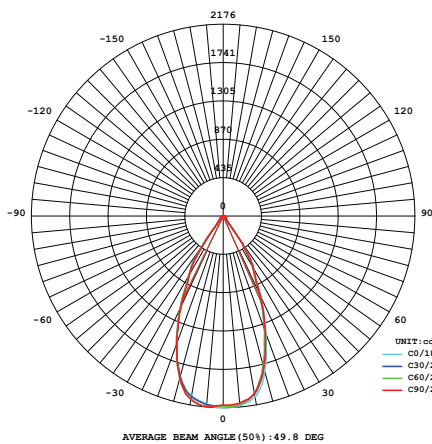

Height	AVR E	CENTER E	Diameter
1.50m	639.32lx	967.02lx	138.65cm
2.00m	359.62lx	543.95lx	184.86cm
4.00m	89.90lx	135.99lx	369.73cm
4.50m	71.04lx	107.45lx	415.94cm
6.00m	39.96lx	60.44lx	554.59cm


Angle: 49.6deg

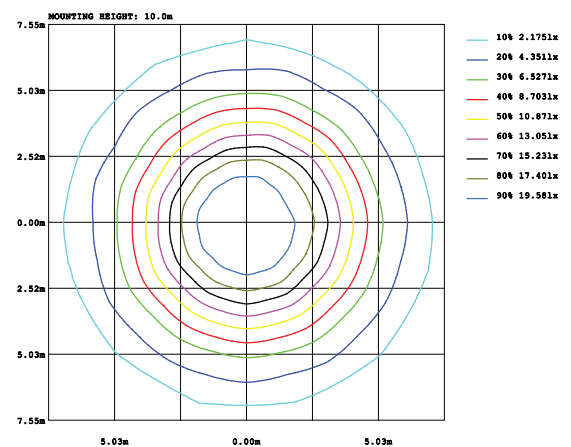


Parameter of PD-AB15/ PD-AW15 | CCT 4000K

INSTALLATION INSTRUCTIONS


1. Fasten the adjustable bracket with screws



3. Connect the lamp to the bracket then fix them with screws



2. Connect the main line to the power wire of the Lamp



PACKING



— 1 pcs —>

