

2700K 3000K 3500K 4000K 5000K 6500K

**CL-BW30/ CL-BB30**


>30.000  
Hours

220-240  
VAC

RoHS

CE

White  
Black



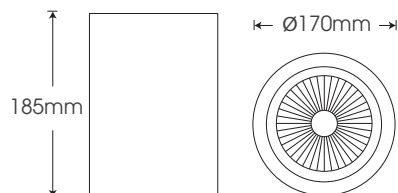


| Model               | Power | Led source | Beam angle | CCT   | CRI | Flux   |
|---------------------|-------|------------|------------|-------|-----|--------|
| CL-BW30/<br>CL-BB30 | 30W   | CREE (USA) | 60°        | 3000K | >80 | 2870lm |
|                     |       |            |            | 4000K |     | 3150lm |
|                     |       |            |            | 5000K |     | 3150lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

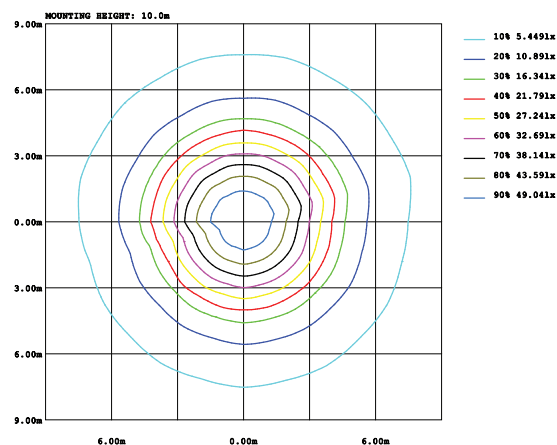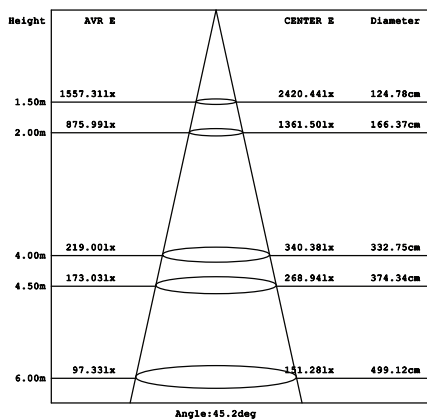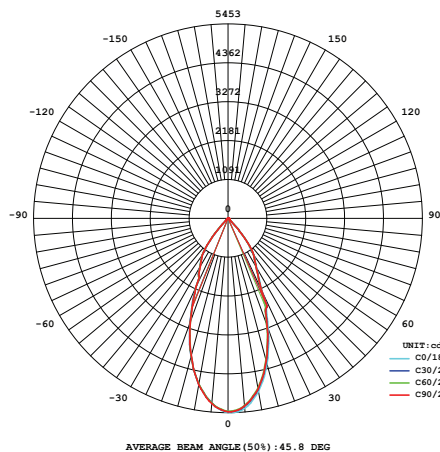

Parameter of CL-BW30/ CL-BB30 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

