


CL-CW15/ CL-CB15

White
Black



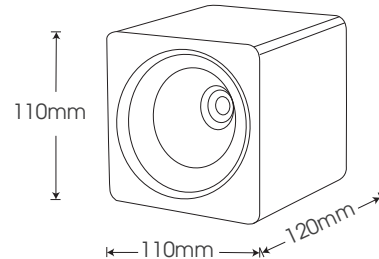


Model	Power	Led source	Beam angle	CCT	CRI	Flux
CL-CW15/ CL-CB15	15W	CREE (USA)	60°	3000K	>80	1475lm
				4000K		1510lm
				5000K		1510lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

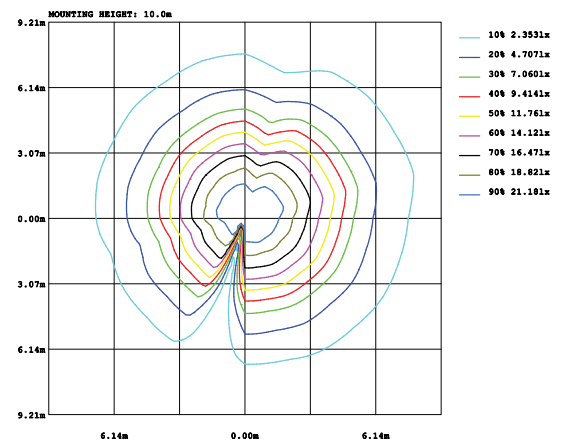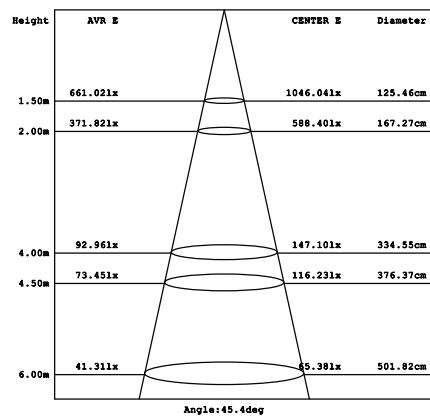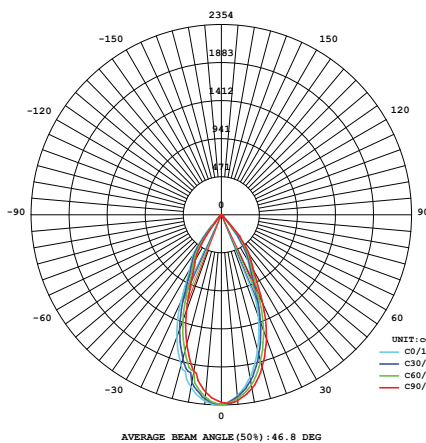

Parameter of CL-CW15/ CL-CB15 CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Install the lid on the back of the lamp to the ceiling
- Connect wires with 220VAC power
- Install the lamp on the fixed lid

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel