




CL-CW30/ CL-CB30

White
Black



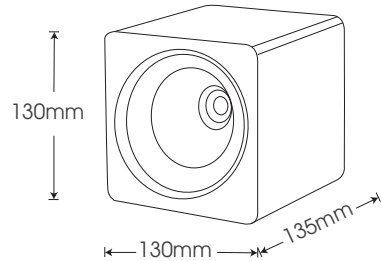


Model	Power	Led source	CCT	CRI	Flux
CL-CW30/ CL-CB30	30W	CREE (USA)	3000K	>80	3335lm
			4000K		3630lm
			5000K		3630lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

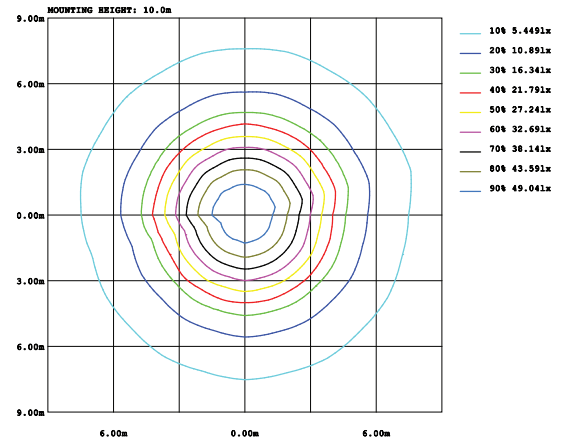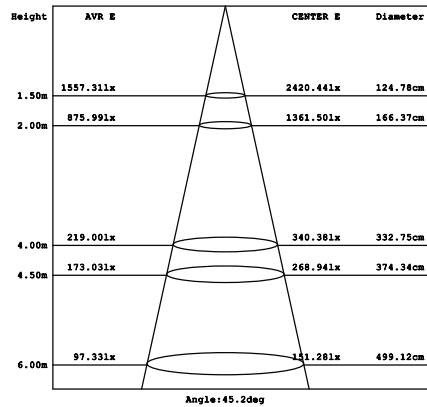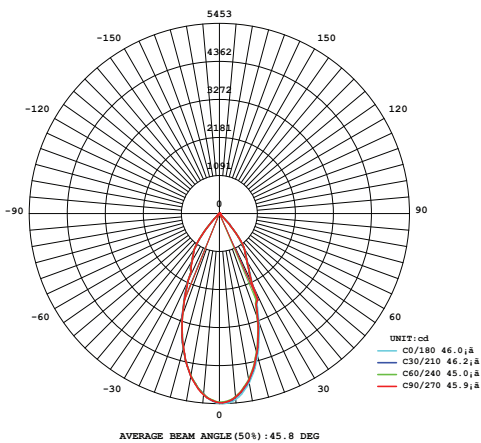


Parameter of CL-CW30/ CL-CB30 CCT 4000K


INSTALLATION INSTRUCTIONS

PACKING


1. Install the lid on the back of the lamp to the ceiling




2. Connect wires with 220VAC power



3. Install the lamp on the fixed lid



Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel



- 1 pcs ->

