




CL-CW35/ CL-CB35

White
Black



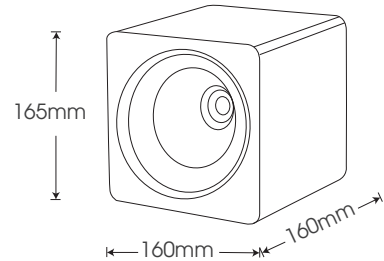


Model	Power	Led source	Beam angle	CCT	CRI	Flux
CL-CW35/ CL-CB35	35W	CREE (USA)	60°	3000K	>80	3585lm
				4000K		3740lm
				5000K		3740lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

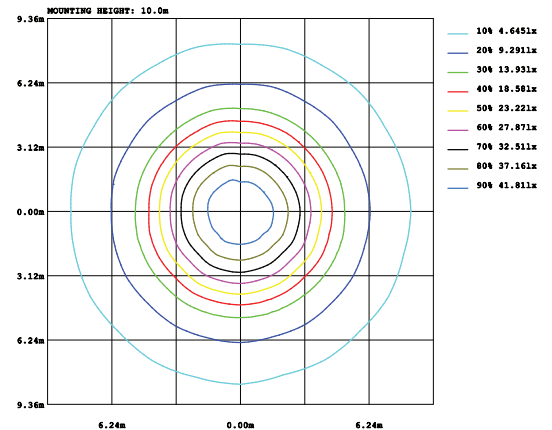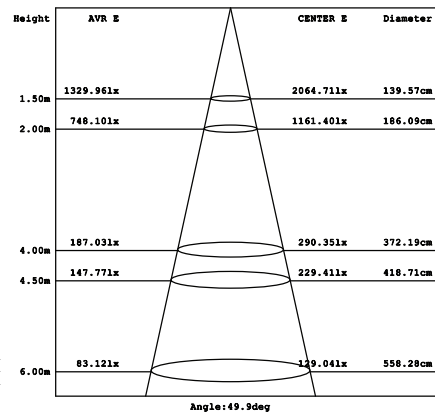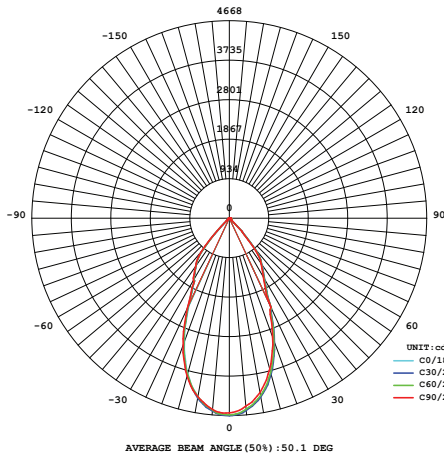

Parameter of CL-CW35/ CL-CB35 CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Install the lid on the back of the lamp to the ceiling
- Connect wires with 220VAC power
- Install the lamp on the fixed lid

Note: Disconnect power, safety checking whole power system before construction. All radiator parts are not exposed directly to iron or steel