


CL-CW40/ CL-CB40

White
Black



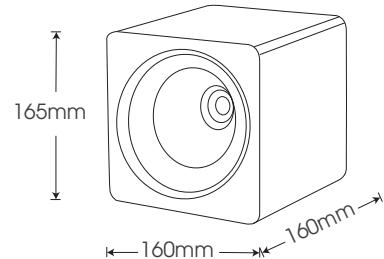


Model	Power	Led source	Beam angle	CCT	CRI	Flux
CL-CW40/ CL-CB40	40W	CREE (USA)	60°	3000K	>80	3845lm
				4000K		4275lm
				5000K		4275lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

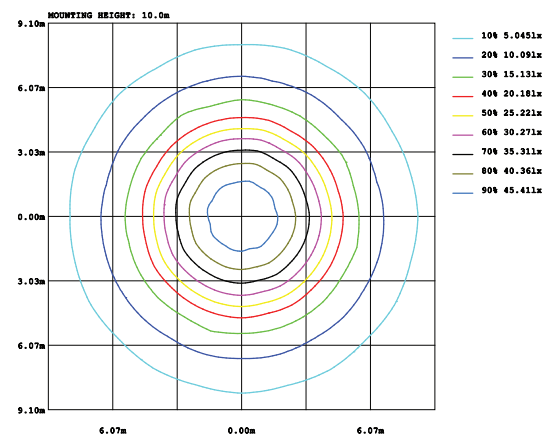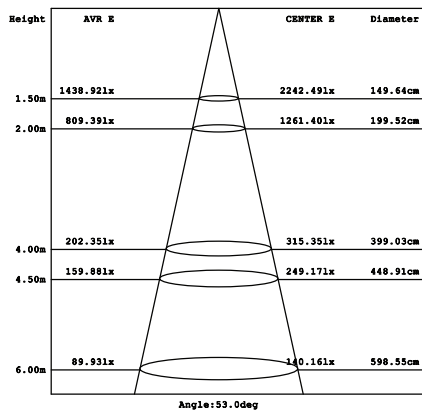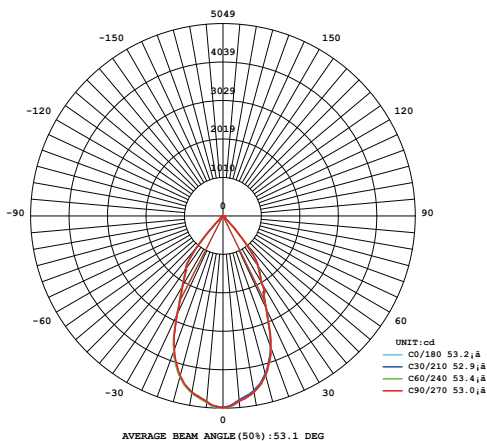


Parameter of CL-CW40/ CL-CB40 CCT 4000K


INSTALLATION INSTRUCTIONS

PACKING


1. Install the lid on the back of the lamp to the ceiling





2. Connect wires with 220VAC power



3. Install the lamp on the fixed lid



Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel



-2 pcs ->

