


DL-DS13/ DL-DW13

□ White

■ Silver



3000K 4000K 6000K




>30.000
Hours


220-240
VAC

RoHS

CE



Ø138mm



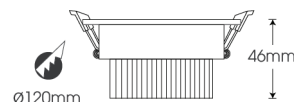


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-DS13 / DL-DW13	13W	OSRAM	36°	3000K	>80	1180lm
				4000K	>80	1245lm
				6000K	>80	1245lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

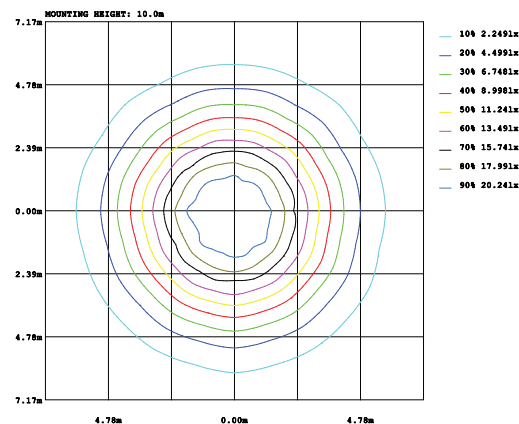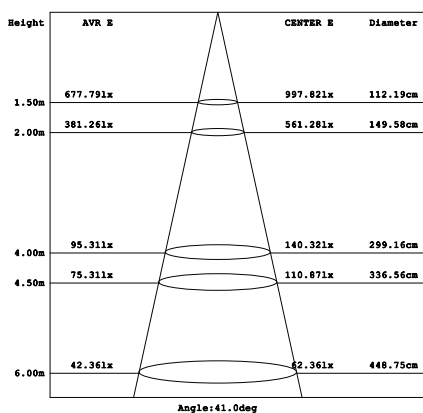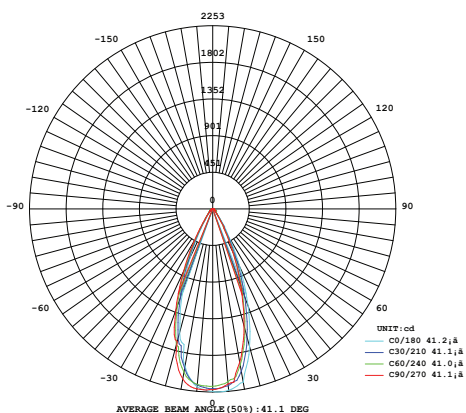

Parameter of DL-DS13 /DL-DW13 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

 Size cut: Ø120mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- Put the lamp on the ceiling**

1 pcs

20 pcs

VinaLED®
Đ dẫn đầu về độ sáng và chất lượng

155mm x 155mm x 90mm

480mm x 330mm x 320mm