

DL-DS8 / DL-DW8

□ White

■ Silver



3000K 4000K 6000K




>30.000
Hours


220-240
VAC

RoHS

CE



Ø110mm

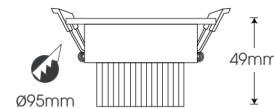

Ø95mm




49mm

Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-DS8 / DL-DW8	8W	OSRAM	36°	3000K	>80	805lm
				4000K	>80	835lm
				6000K	>80	835lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

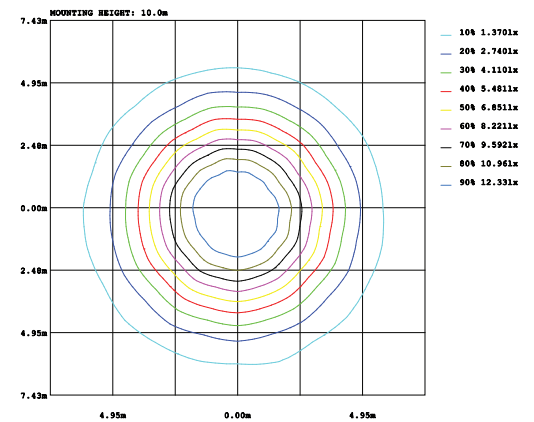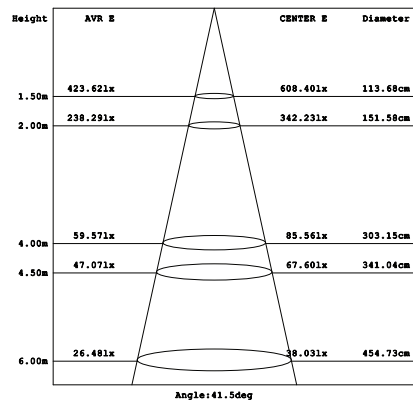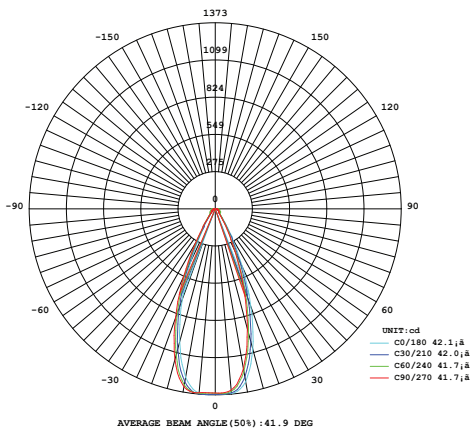

Parameter of DL-DS8 /DL-DW8 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

Size cut: Ø95mm
- Connected Led Driver with 220VAC power**

≈ 220VAC → Driver → Jack → Ceiling cut
- Connected Led Driver with lamp**
- Put the lamp on the ceiling**

1 pcs
 30 pcs
 120mm x 120mm x 90mm
 470mm x 370mm x 250mm