

DL-ES11/ DL-EW11


☐ White

☐ Silver



3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-ES11/ DL-EW11	11W	Bridgelux(USA)	120°	3000K	>80	915lm
				4000K	>80	995lm
				5000K	>80	995lm
				6500K		

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

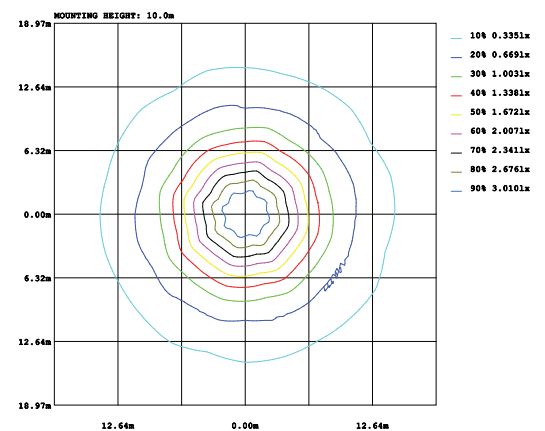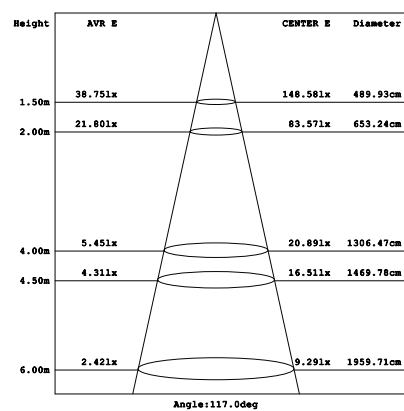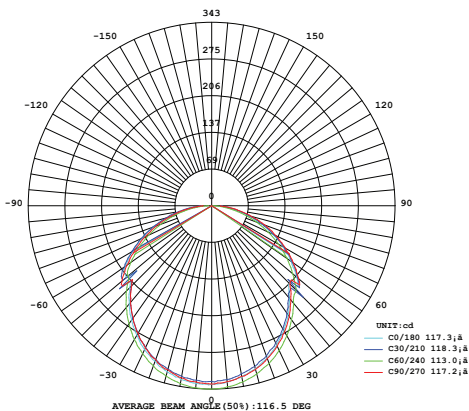

Parameter of DL-ES11/ DL-EW11 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

