


3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE

DL-ES15/ DL-EW15

White
Silver



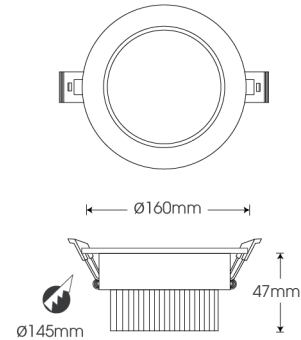


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-ES15/ DL-EW15	15W	Bridgelux(USA)	120°	3000K	>80	1260lm
				4000K	>80	1345lm
				5000K	>80	1345lm
				6500K		

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

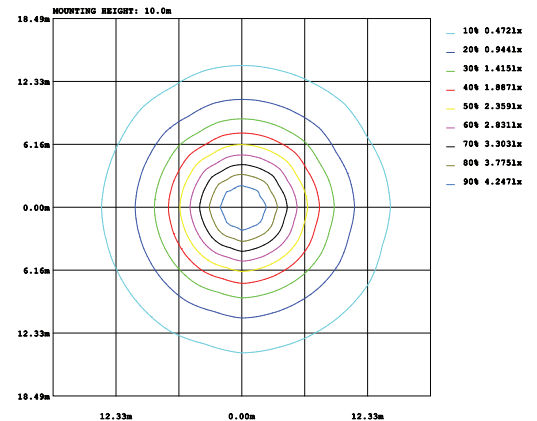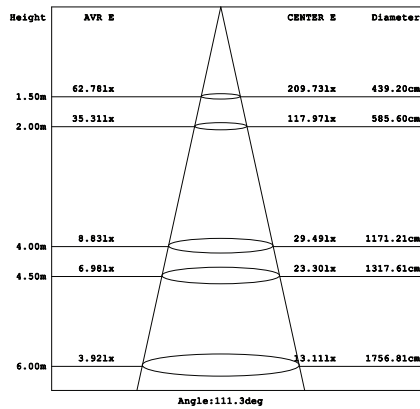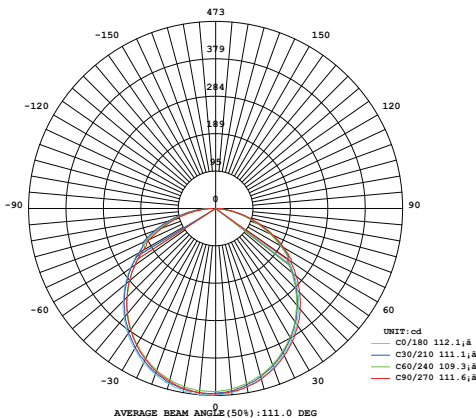

Parameter of DL-ES15/ DL-EW15 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

