


DL-ES18/ DL-EW18

☐ White
☒ Silver



3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE




Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-ES18/ DL-EW18	18W	Bridgelux(USA)	120°	3000K	>80	1500lm
				4000K	>80	1680lm
				5000K	>80	1680lm
				6500K		


LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

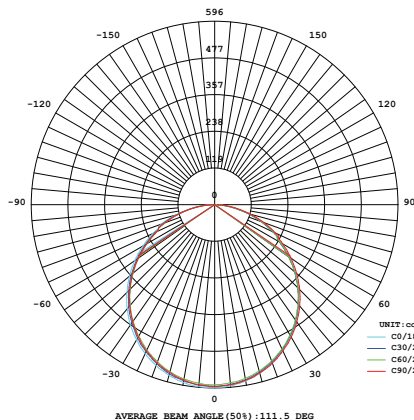

Height	AVR E	CENTER E	Diameter
1.50m	70.73lx	264.44lx	441.35cm
2.00m	44.29lx	140.75lx	580.47cm
4.00m	11.07lx	37.19lx	1176.93cm
4.50m	8.75lx	29.30lx	1324.05cm
6.00m	4.92lx	16.53lx	1765.40cm

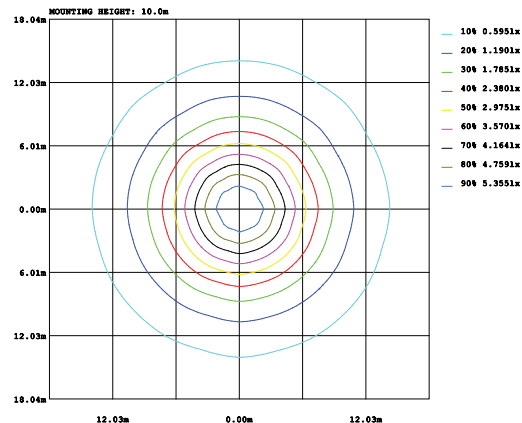

Parameter of DL-ES18/ DL-EW18 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

