


3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE

DL-ES6/ DL-EW6

White
Silver



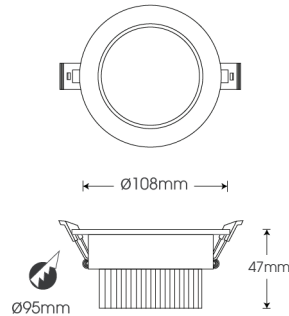


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-ES6/ DL-EW6	6W	Bridgelux	120°	3000K	>80	520lm
				4000K	>80	580lm
				5000K	>80	580lm
				6500K		

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

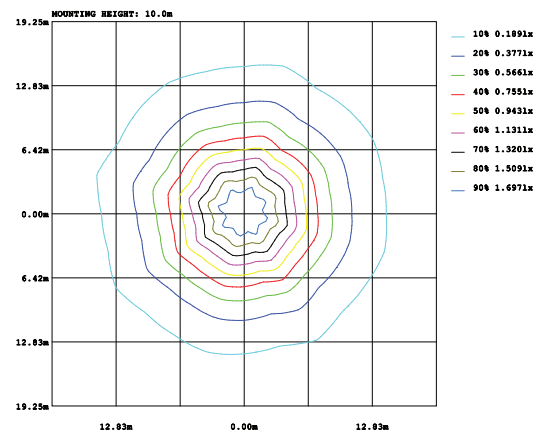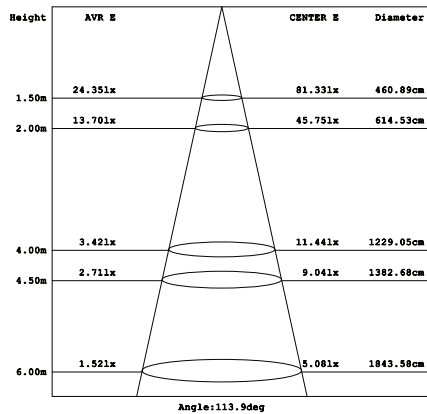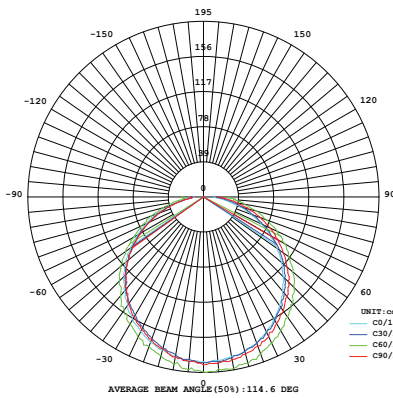

Parameter of DL-ES6/ DL-EW6 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

