


3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE

DL-ES9/ DL-EW9

White
Silver






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-ES9/ DL-EW9	9W	Bridgelux	120°	3000K	>80	790lm
				4000K	>80	810lm
				5000K	>80	810lm
				6500K		

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

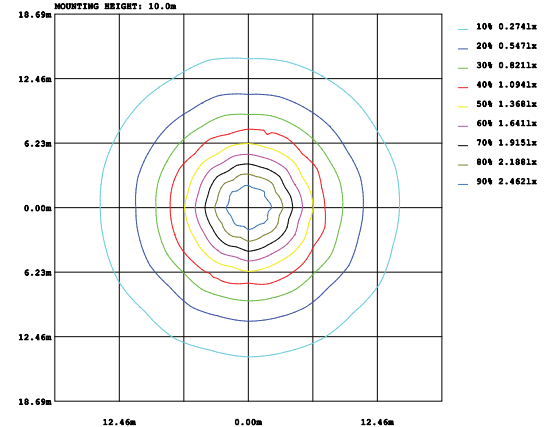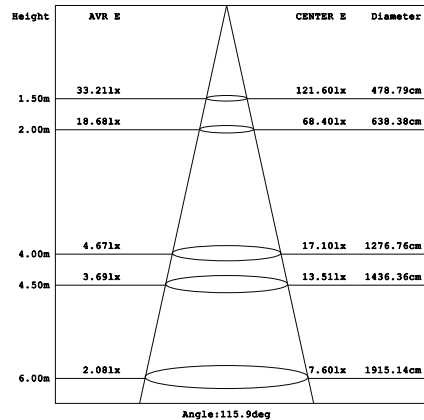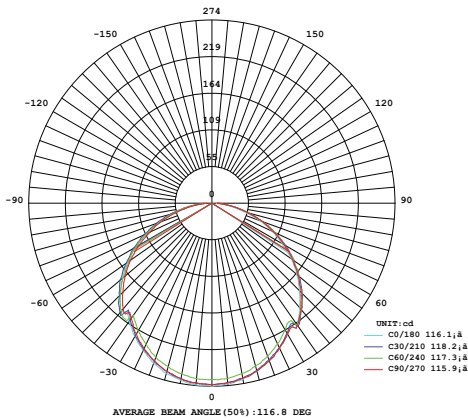

Parameter of DL-ES9/ DL-EW9 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**
Size cut: Ø95mm
- Connected Led Driver with 220VAC power**
- Connected Led Driver with lamp**
Diagram showing the driver connected to a ceiling cut and the lamp.
- Put the lamp on the ceiling**
Diagram showing the lamp being pushed into the ceiling cut.