


DL-GW15

White



2700K 3000K 3500K 4000K 5000K 6500K

>30,000 Hours 220-240 VAC RoHS CE




Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-GW15	15W	CITIZEN (Japan)	50°	3000K	>80	1380lm
				4000K	>80	1525lm
				5000K	>80	1525lm


LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

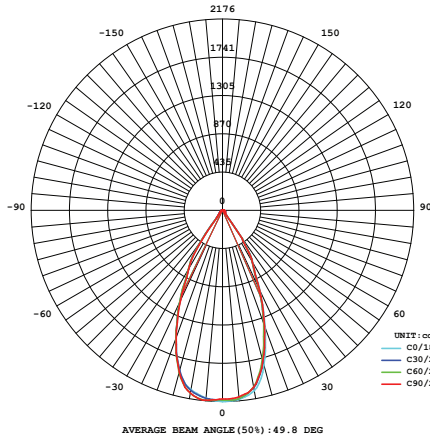

Height	AVR E	CENTER E	Diameter
1.50m	639.32lx	967.02lx	138.65cm
2.00m	359.62lx	543.95lx	104.86cm
4.00m	89.90lx	135.99lx	369.73cm
4.50m	71.04lx	107.45lx	415.94cm
6.00m	39.96lx	60.44lx	554.59cm

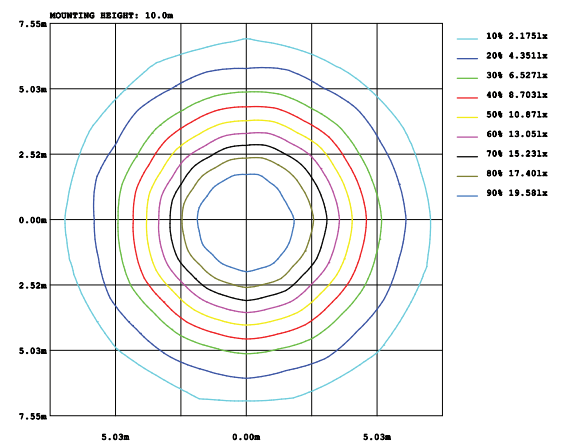

Parameter of DL-GW15 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

