


DL-GW20

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-GW20	20W	CITIZEN (Japan)	54°	3000K	>80	2130lm
					>90	1955lm
				4000K	>80	2260lm
					>90	2025lm
5000K	>80	2260lm				

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

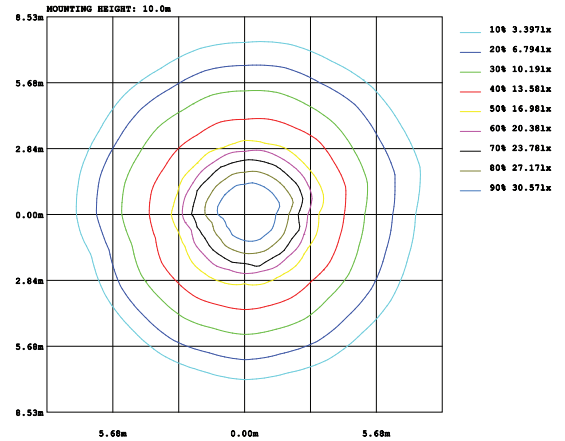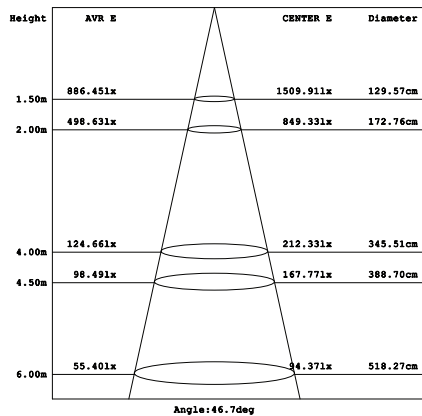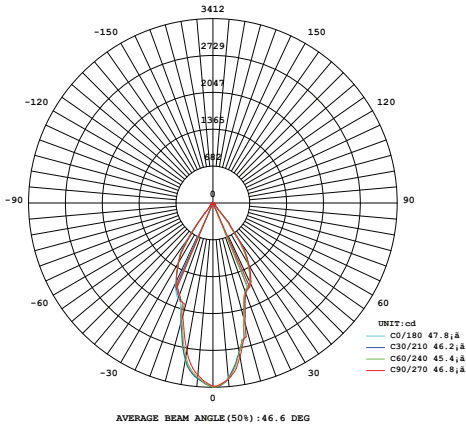

Parameter of DL-GW20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Ceiling cut

Size cut: Ø180mm

3. Connected Led Driver with 220VAC power
4. Connected Led Driver with lamp

≈ 220VAC

2. Remove the circle on the front
Rotate clockwise and remove

5. Fix the lamp to the ceiling
Use a screwdriver to tighten, fix the lamp to the ceiling

6. Finish
Install the front circle into the lamp
Rotate counterclockwise

1 pcs

100mm

210mm

210mm

8 pcs

530mm

350mm

310mm