


DL-GW50

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-GW50	50W	CITIZEN (Japan)	60°	3000K	>80	5025lm
					>90	4510lm
				4000K	>80	5110lm
					>90	4615lm
				5000K	>80	5110lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

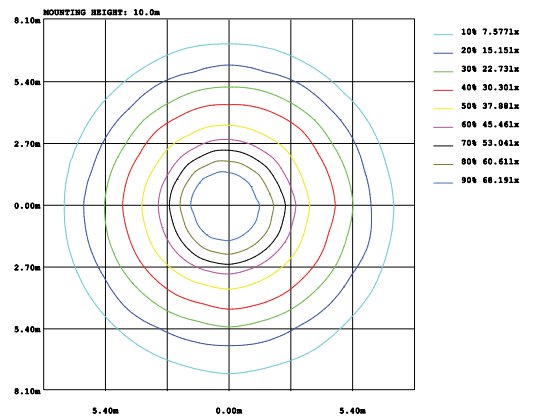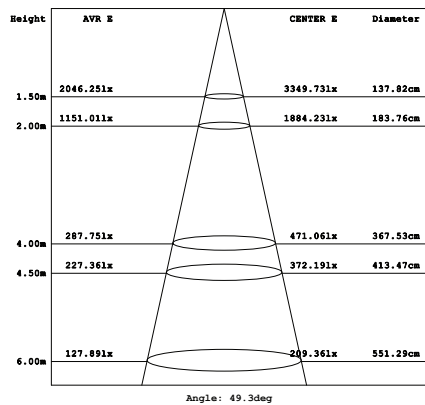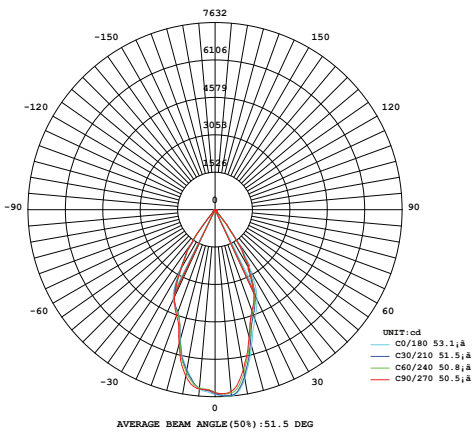

Parameter of DL-GW50N | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Ceiling cut

Size cut: Ø206mm

3. Connected Led Driver with 220VAC power
4. Connected Led Driver with lamp

2. Remove the circle on the front

Rotate clockwise and remove

5. Fix the lamp to the ceiling

Use a screwdriver to tighten, fix the lamp to the ceiling

6. Finish

Install the front circle into the lamp
 Rotate counterclockwise

1 pcs
 4 pcs

VinaLED®
 Dẫn đầu về độ sáng và chất lượng