


DL-IW15

White

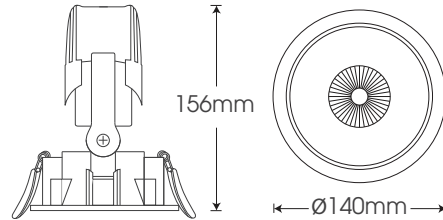




Ø125mm

Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-IW15	15W	CITIZEN (Japan)	24°	3000K	>80	1220lm
					>90	1010lm
				4000K	>80	1325lm
					>90	1065lm
				5000K	>80	1325lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

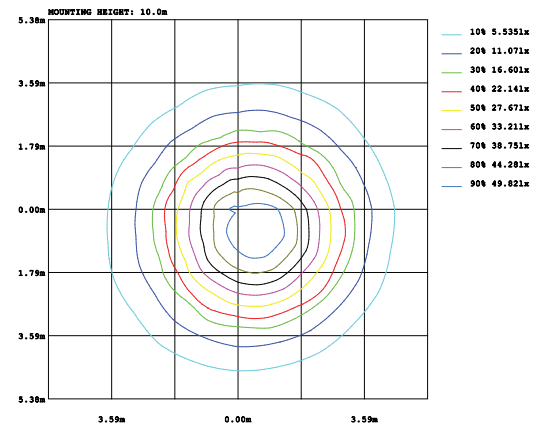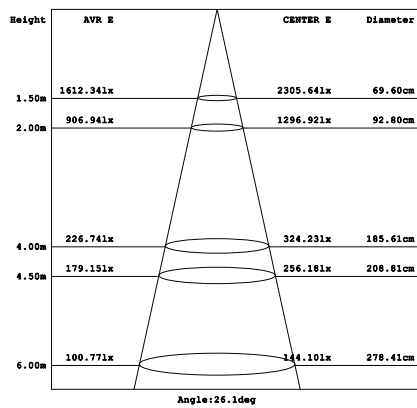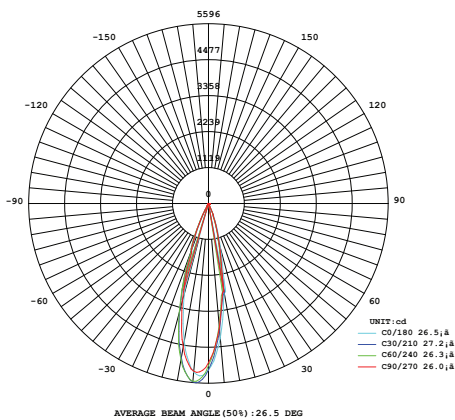

Parameter of DL-IW15 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**
Size cut: Ø125mm
- Connected Led Driver with 220VAC power**
- Connected Led Driver with lamp**
Diagram showing connection of Driver, Jack, and Ceiling cut.
- Put the lamp on the ceiling**
Diagram showing the lamp being inserted into the ceiling cutout.