


DL-IW30

White



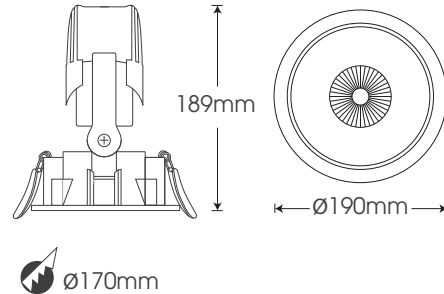


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-IW30	30W	CITIZEN (Japan)	42°	3000K	>80	2360lm
					>90	2225lm
				4000K	>80	2535lm
					>90	2295lm
				5000K	>80	2535lm
					>90	2295lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

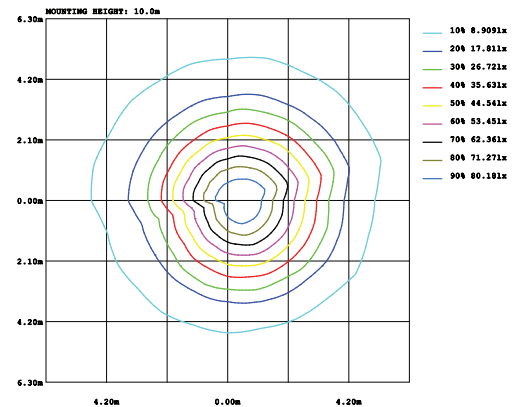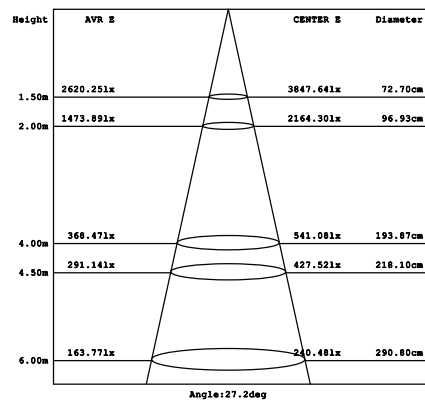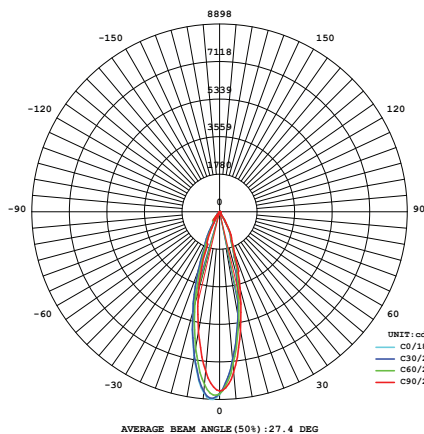

Parameter of DL-IW30 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

