





2700K 3000K 3500K 4000K 5000K 6500K

DL-KW40

White




Ø220mm

Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-KW40	40W	CREE (USA)	50°	3000K	>80	3055lm
				4000K	>80	3610lm
				5000K	>80	3610lm


LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure


ISOLUX DIAGRAM

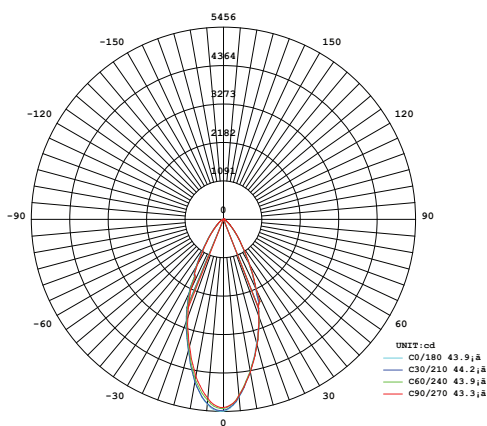

AVERAGE BEAM ANGLE (50°): 43.8 DEG

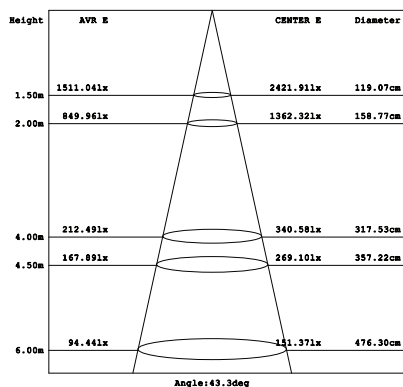

Parameter of DL-KW40 | CCT 4000K

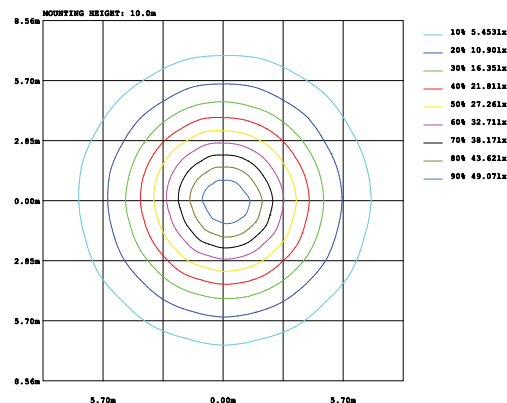

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

 Size cut: Ø195mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp

 ≈ 220VAC → Driver → Jack → Ceiling cut
- 4. Put the lamp on the ceiling**

1 pcs → 220mm x 190mm x 220mm box
 4 pcs → 470mm x 370mm x 250mm box