


DL-LW10/DL-LB10

White
Black



Ø114mm

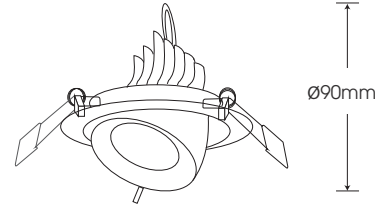


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-LW10	10W	CREE (USA)	24°/38°	3000K	>80	855lm
					>90	640lm
				4000K	>80	1000lm
					>90	760lm
				5000K	>80	1000lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

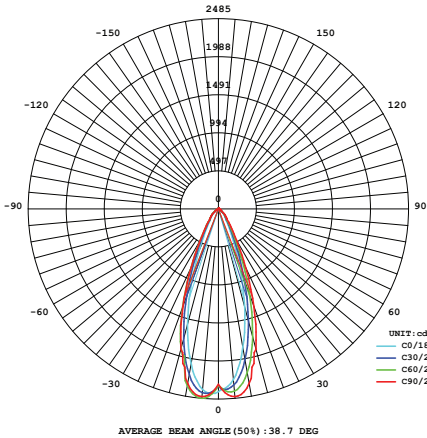

Height	AVR E	CENTER E	Diameter
1.50m	827.04lx	1060.93lx	90.82cm
2.00m	465.21lx	596.78lx	121.09cm
4.00m	116.30lx	149.19lx	242.19cm
4.50m	91.89lx	117.88lx	272.46cm
6.00m	51.69lx	66.31lx	363.28cm

Angle: 33.7deg

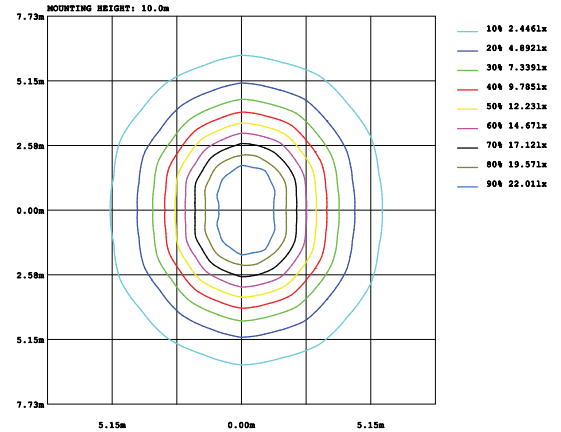

Parameter of DL-LW10 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Celling cut**
- Connect led driver with 220VAC power**
3. Connect led driver with lamp
- Put the lamp inside the ceiling hole**
- Install finishing**

adjust the light direction