


## DL-LW25/DL-LB25

White  
Black



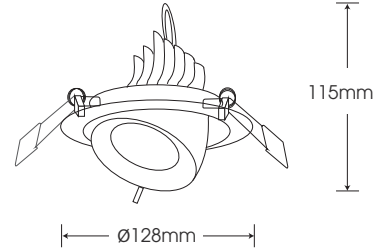


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-LW25/DL-LB25	25W	CREE (USA)	24°/38°	3000K	>80	1845lm
					>90	1410lm
				4000K	>80	1970lm
					>90	1480lm
				5000K	>80	1970lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

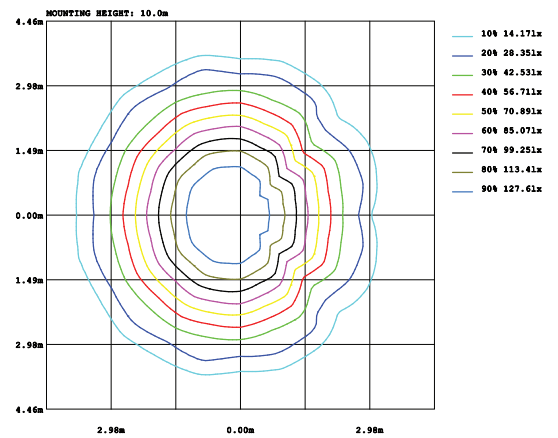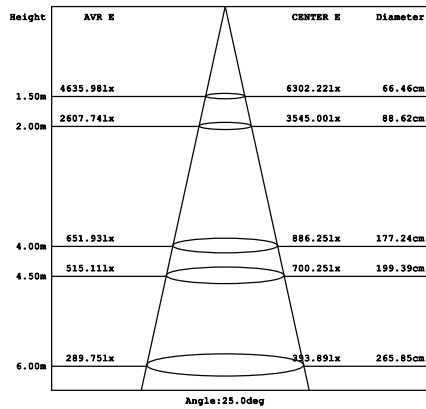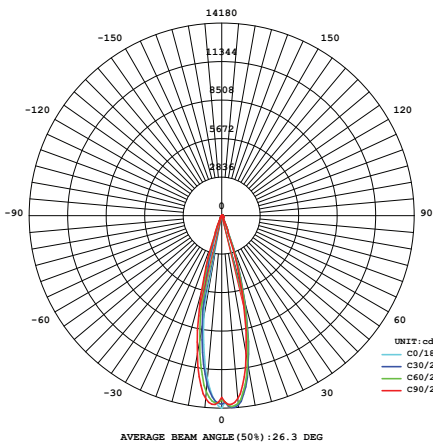

Parameter of DL-LW25/DL-LB25 | CCT 4000K

### INSTALLATION INSTRUCTIONS

### PACKING

- Celling cut**
- Connect led driver with 220VAC power**  
**3. Connect led driver with lamp**
- Put the lamp inside the ceiling hole**
- Install finishing**