


DL-LW35/DL-LB35

White
Black



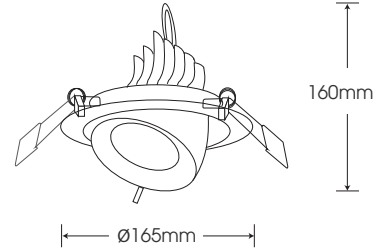


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-LW35/DL-LB35	35W	CREE (USA)	24°/38°	3000K	>80	3060lm
					>90	2760lm
				4000K	>80	3175lm
					>90	2825lm
				5000K	>80	3175lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

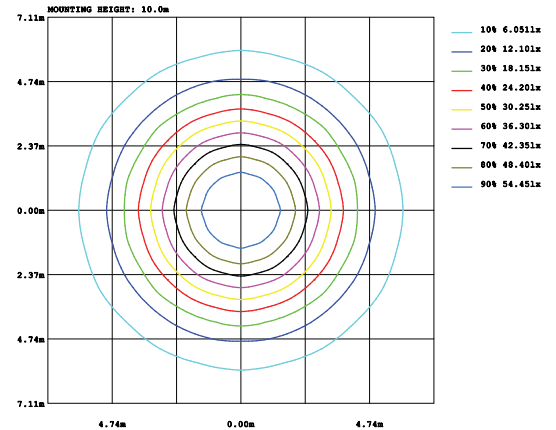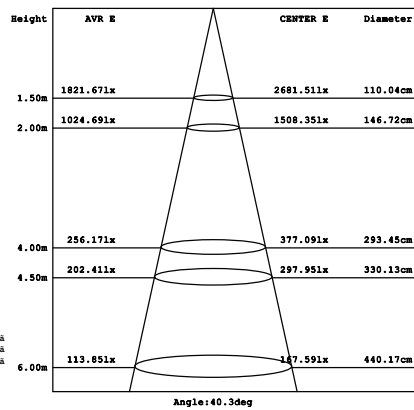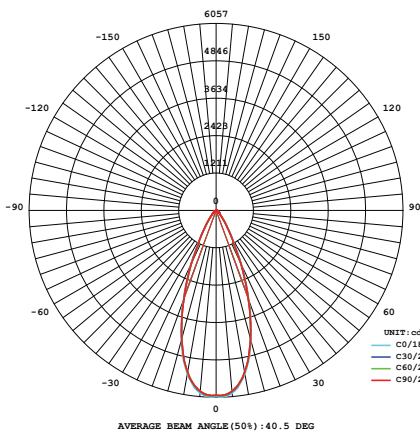

Parameter of DL-LW35/DL-LB35 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Celling cut**
- Connect led driver with 220VAC power**
3. Connect led driver with lamp
- Put the lamp inside the ceiling hole**
- Install finishing**

adjust the light direction

1 pcs
2 pcs