




## DL-LW6/DL-LB6

- White
- Black

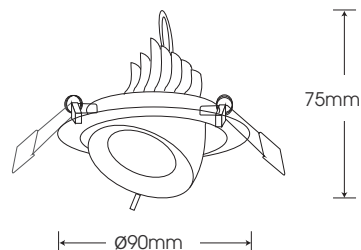


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-LW6/DL-LB6	6W	CREE (USA)	24°/38°	3000K	>80	530lm
					>90	485lm
				4000K	>80	545lm
					>90	500lm
				5000K	>80	545lm

### LAMP PHOTOMETRIC REPORT


### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

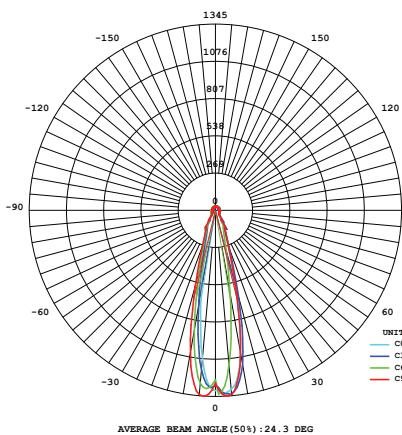

Height	AVR E	CENTER E	Diameter
1.50m	458.00lx	578.98lx	59.87cm
2.00m	257.63lx	325.68lx	79.83cm
4.00m	64.41lx	81.42lx	159.66cm
6.00m	28.63lx	36.19lx	239.49cm
10.00m	10.31lx	13.03lx	399.15cm

Angle: 22.6deg

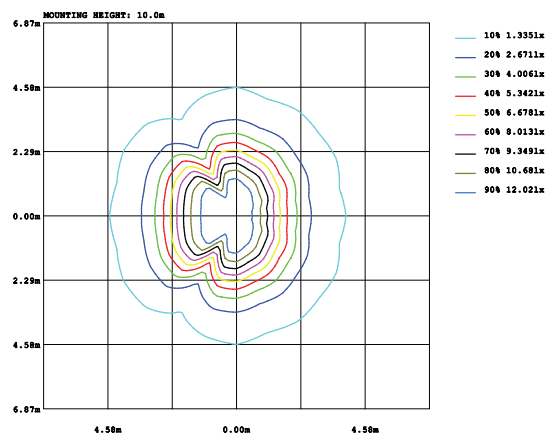

Parameter of DL-LW6/DL-LB6 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Celling cut**
- Connect led driver with 220VAC power**  
**3. Connect led driver with lamp**
- Put the lamp inside the ceiling hole**
- Install finishing**  
  
adjust the light direction

### PACKING