



## DL-NW14

White

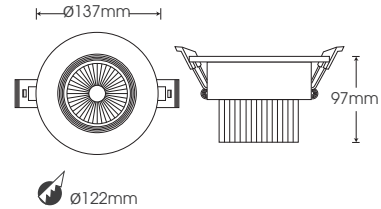

3000K 4000K 6500K






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-NW14	14W	EDISON (Taiwan)/ CITIZEN (Japan)*	24°/38°	3000K	>80	1155lm
					>90	1075lm
				4000K	>80	1295lm
					>90	1090lm
				6500K	>80	1295lm
					>90	1095lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

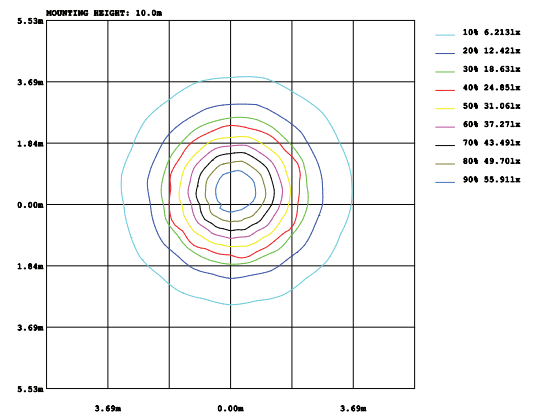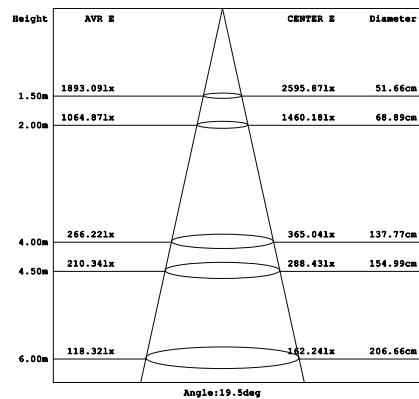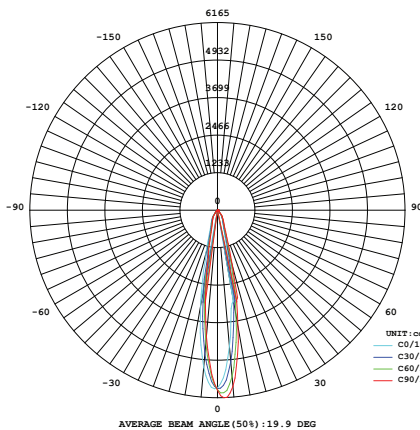

Parameter of DL-NW14 | CCT 4000K

### INSTALLATION INSTRUCTIONS

### PACKING

- Ceiling cut**  
  
 Size cut: Ø122mm
- Connected Led Driver with 220VAC power**  
**3. Connected Led Driver with lamp**
- Put the lamp on the ceiling**

1 pcs → 12 pcs → VinaLED®  
 110mm x 160mm x 160mm → 470mm x 370mm x 250mm