





2700K 3000K 3500K 4000K 5000K 5700K



DL-PW15 / DL-PB15

White



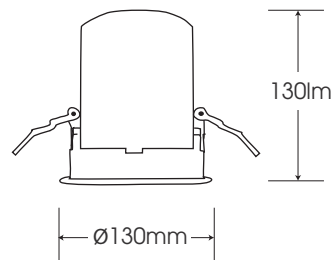


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-PW15/ DL-PB15	15W	CREE (USA)	24°/36°	3000K	>80	1195lm
					>90	1100lm
				4000K	>80	1300lm
					>90	1175lm
				5000K	>80	1300lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

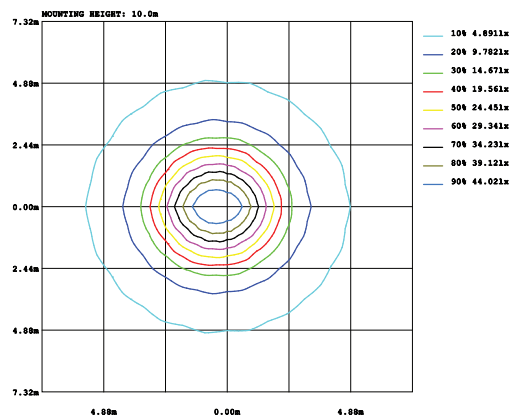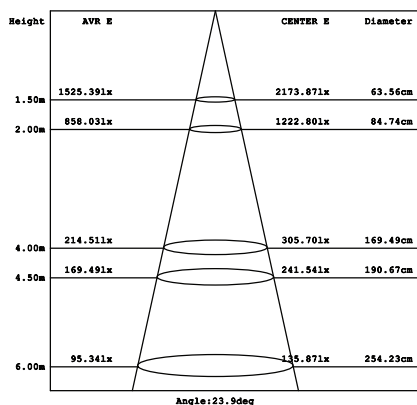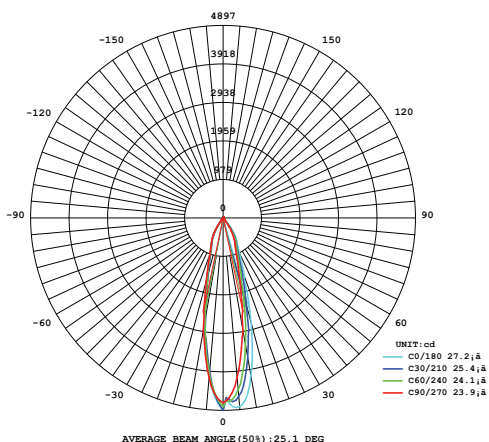

Parameter of DL-PW15/ DL-PB15 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

Size cut: Ø170mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- 4. Put the lamp on the ceiling**

VinaLED®
Đ dẫn đầu về độ sáng và chất lượng