




DL-PW20/DL-PB20

White



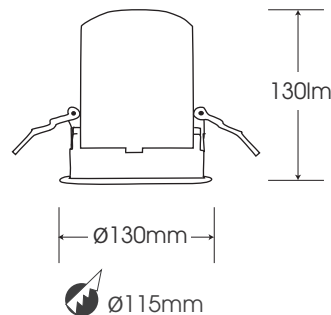


| Model | Power | Led source | Beam angle | CCT | CRI | Flux |
|-----------------|-------|------------|------------|-------|-----|--------|
| DL-PW20/DL-PB20 | 20W | CREE (USA) | 24°/36° | 3000K | >80 | 1680lm |
| | | | | | >90 | 1410lm |
| | | | | 4000K | >80 | 1735lm |
| | | | | | >90 | 1490lm |
| | | | | 5000K | >80 | 1735lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

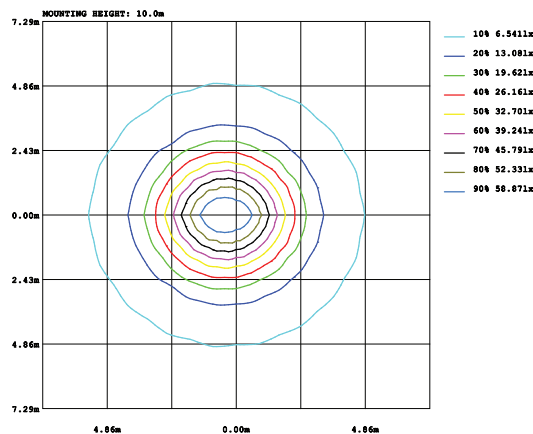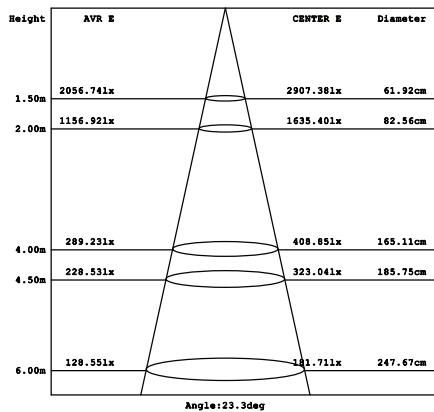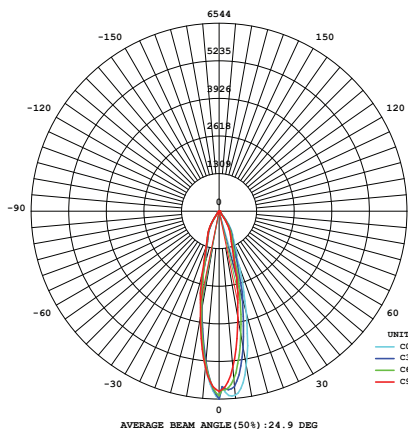

Parameter of DL-PW20/DL-PB20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**
Size cut: Ø170mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- Put the lamp on the ceiling**