




DL-PW25/DL-PB25

White




Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-PW25/DL-PB25	25W	CREE (USA)	24°/36°	3000K	>80	2025lm
					>90	1920lm
				4000K	>80	2140lm
					>90	2055lm
				5000K	>80	2140lm



LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

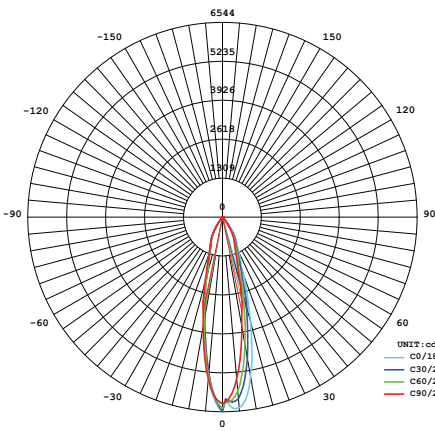

AVERAGE BEAM ANGLE (50%): 24.9 DEG

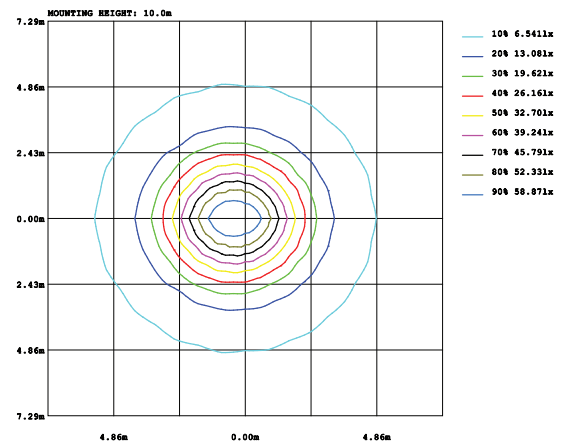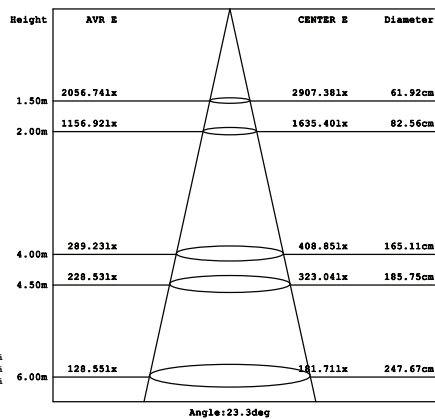

Parameter of DL-PW25/DL-PB25 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

 Size cut: Ø170mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- Put the lamp on the ceiling**

1 pcs