




DL-PW40/DL-PB40

White






2700K 3000K 3500K 4000K 5000K 5700K

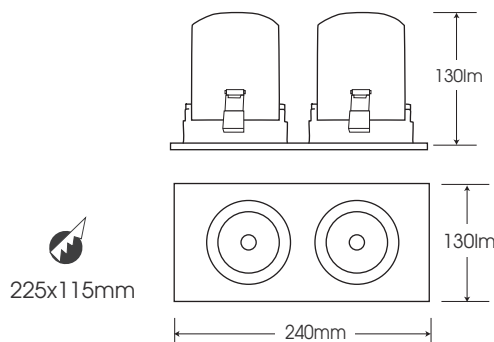

Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-PW40/ DL-PB40	40W	CREE (USA)	24°/36°	3000K	>80	3450lm
					>90	3050lm
				4000K	>80	3530lm
					>90	3210lm
				5000K	>80	3530lm

LAMP PHOTOMETRIC REPORT AVERAGE AND CENTER E Figure ISOLUX DIAGRAM

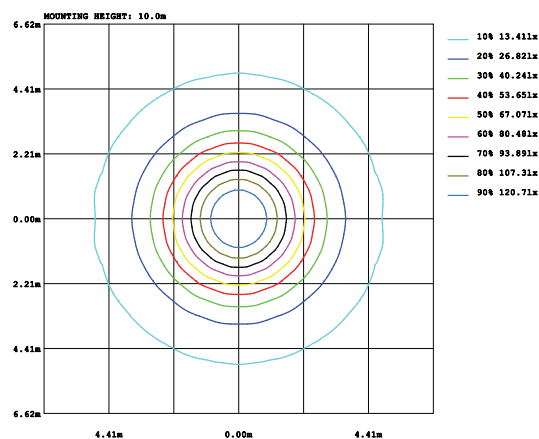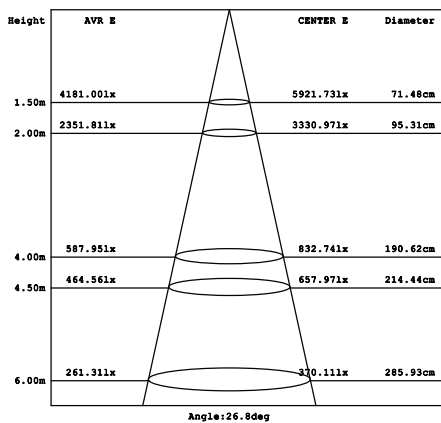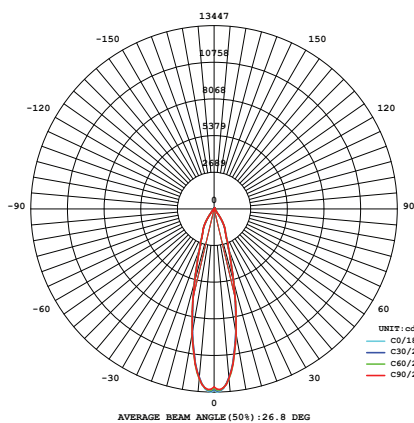

Parameter of DL-PW40/ DL-PB40 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Ceiling cut**
Size cut: Ø170mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- Put the lamp on the ceiling**

PACKING

