




2700K 3000K 3500K 4000K 5000K 5700K




DL-PW50/DL-PB50

White



225x115mm






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-PW50/ DL-PB50	50W	CREE (USA)	24°/36°	3000K	>80	4050lm
					>90	3850lm
				4000K	>80	4280lm
					>90	3910lm
				5000K	>80	4280lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

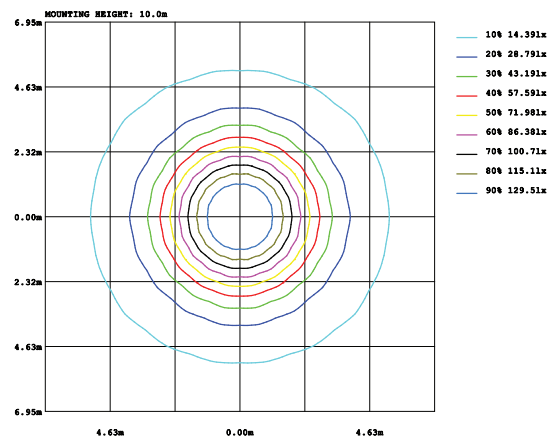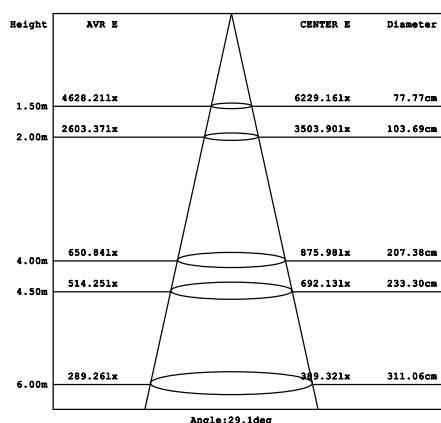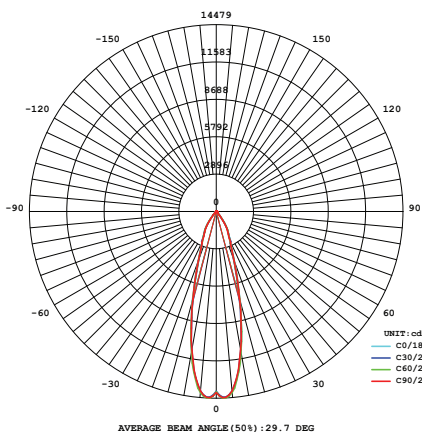

Parameter of DL-PW50/ DL-PB50 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Ceiling cut**

Size cut: Ø170mm
- Connected Led Driver with 220VAC power**

≈ 220VAC → Driver → Jack → Ceiling cut
- Connected Led Driver with lamp**
- Put the lamp on the ceiling**

PACKING

1 pcs → 6 pcs

Box dimensions: 170mm x 170mm x 170mm

Outer box dimensions: 540mm x 360mm x 310mm