

2700K 3000K 3500K 4000K 5000K 5700K

>30.000
Hours


220-240
VAC

RoHS

CE

DL-RW30

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-RW30	30W	CREE (USA)	60°/90°	3000K	>80	3015lm
				4000K	>80	3140lm
				5000K	>80	3140lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

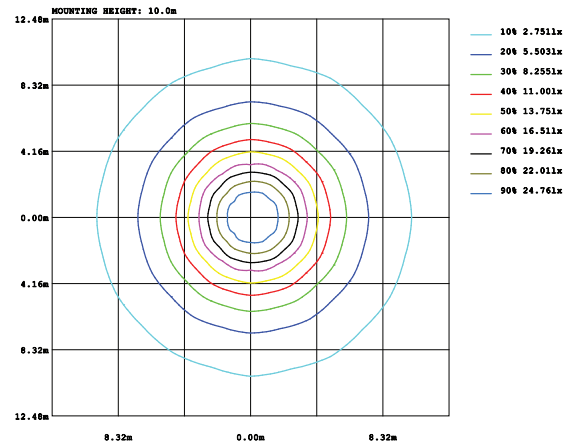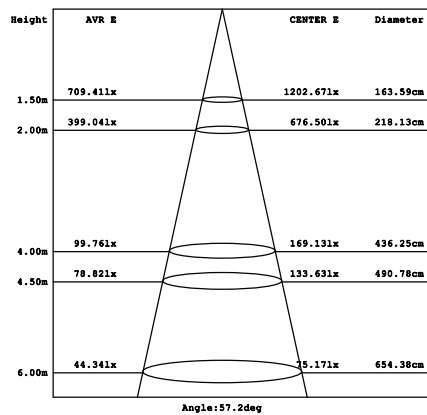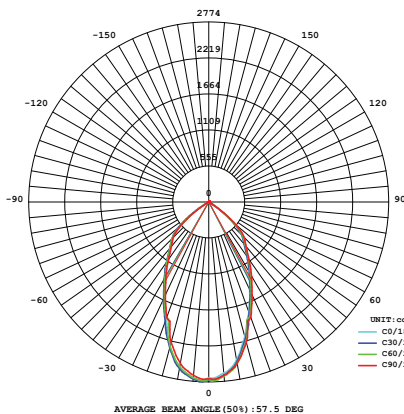

Parameter of DL-RW30 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Ceiling cut

2. Connected Led Driver with 220VAC power
3. Connected Led Driver with lamp

4. Put the lamp on the ceiling