


DL-RW40

White






Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-RW40	40W	CREE (USA)	60°/90°	3000K	>80	3615lm
				4000K	>80	3950lm
				5000K	>80	3950lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

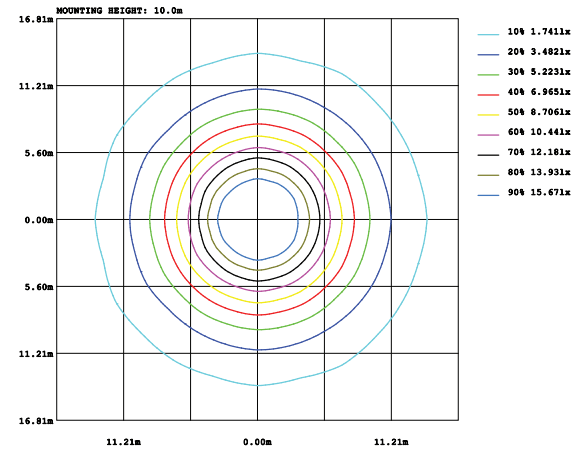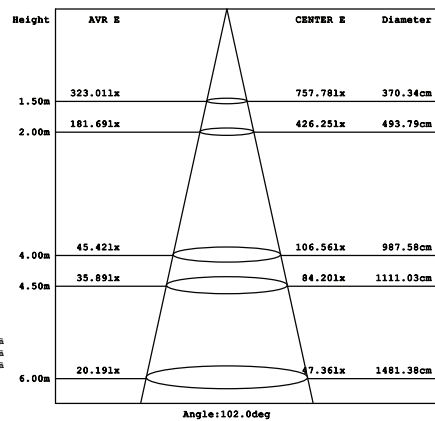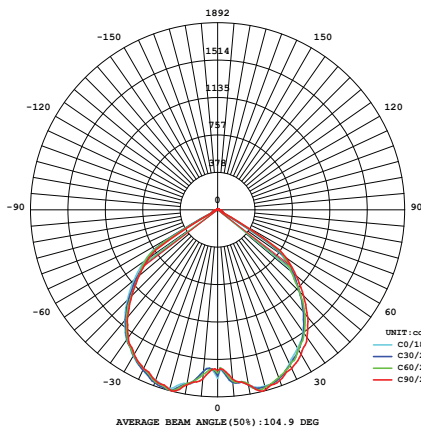

Parameter of DL-RW40N-90 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp
- Put the lamp on the ceiling**

1 pcs

VinaLED®
Dẫn đầu về độ sáng và chất lượng

240mm x 240mm x 100mm