


DL-SW25

White



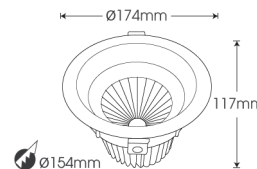


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-SW25	25W	CREE (USA)	15°/24°/38°/60°	3000K	>80	2350lm
				4000K	>80	2460lm
				5000K	>80	2460lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

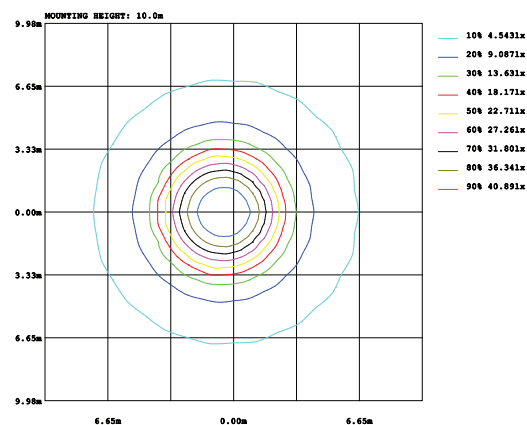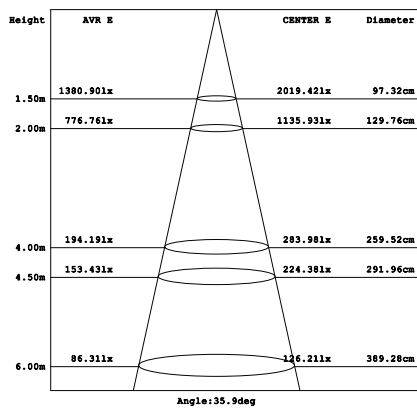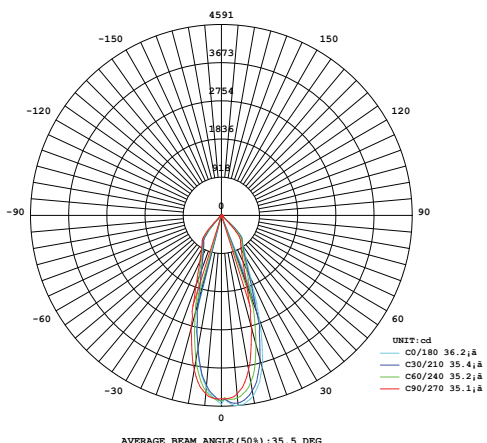

Parameter of DL-SW25 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**
Size cut: Ø154mm
- Connected Led Driver with 220VAC power**
- Connected Led Driver with lamp**
Diagram showing connection of 220VAC to Driver, Driver to Jack, and Jack to Ceiling cut.
- Put the lamp on the ceiling**
Diagram showing the lamp being inserted into the ceiling cut.