


**DL-TW24**

White



2700K 3000K 3500K 4000K 5000K 5700K

IP65

>30,000  
Hours

220-240  
VAC

RoHS




CE

| Model   | Power | Led source | Beam angle  | CCT   | CRI | Flux   |
|---------|-------|------------|-------------|-------|-----|--------|
| DL-TW24 | 24W   | CREE (USA) | 15°/30°/45° | 3000K | >80 | 1815lm |
|         |       |            |             | 4000K | >80 | 1930lm |
|         |       |            |             | 5000K | >80 | 1930lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

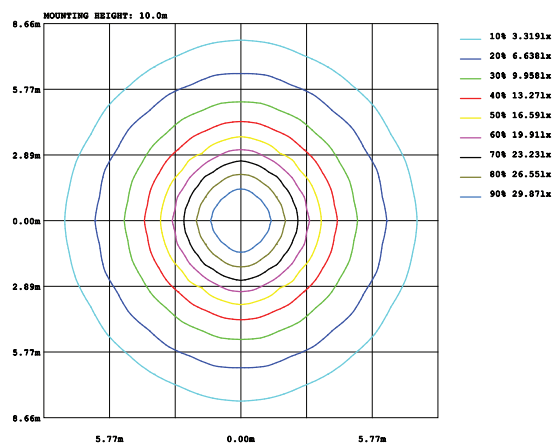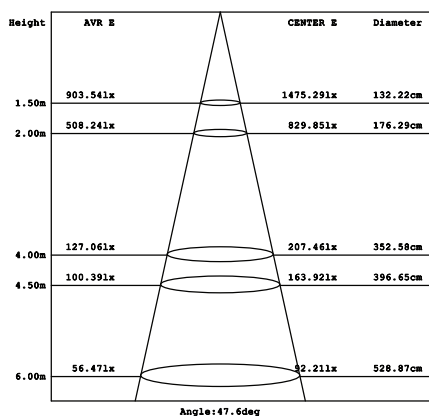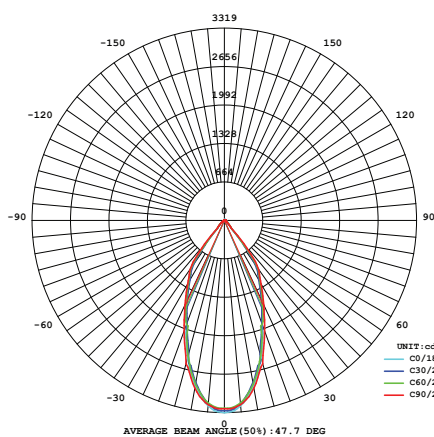


Parameter of DL-TW24 | CCT 4000K

INSTALLATION INSTRUCTIONS


PACKING

1. Ceiling cut




Size cut: Ø115mm

2. Connected Led Driver with 220VAC power  
3. Connected Led Driver with lamp

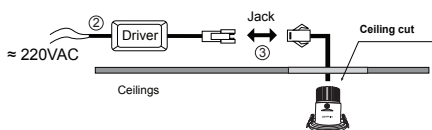

4. Put the lamp on the ceiling



→ 1 pcs →

