

DL-TW30

White



3000K 4000K 5000K


IP65

>30,000
Hours

220-240
VAC

RoHS

CE



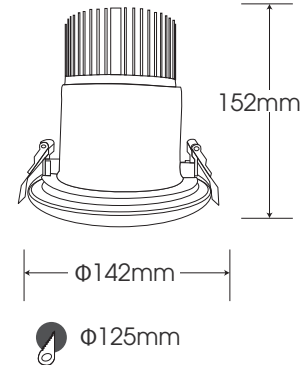


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-TW30	30W	CREE (USA)	24° / 36° / 60°	3000K	>80	1315lm
				4000K	>80	1660lm
				5000K	>80	1660lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

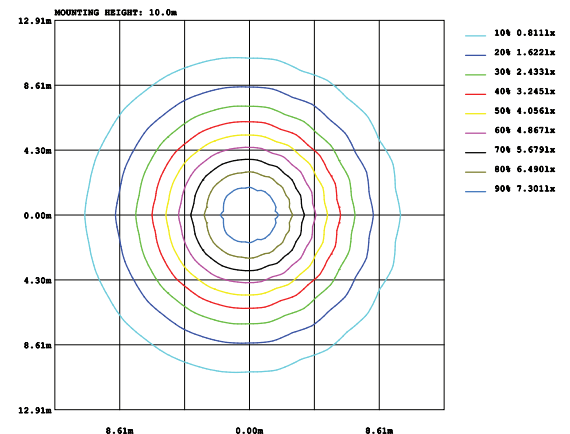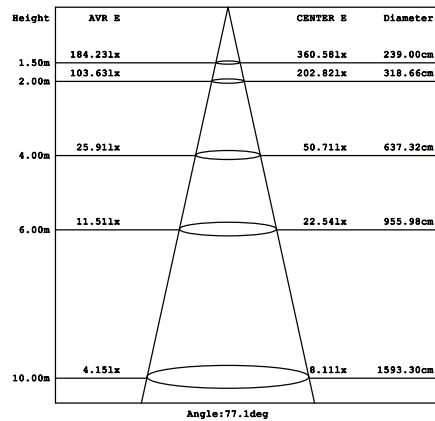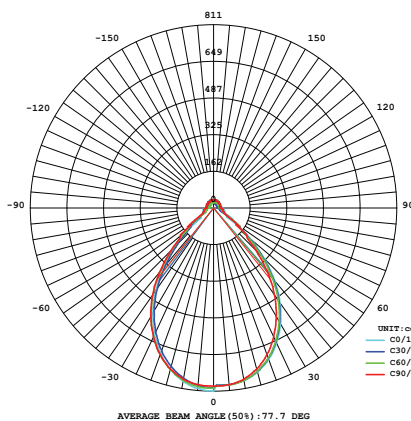

Parameter of DL-TW30 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

