




DL-JW20

White

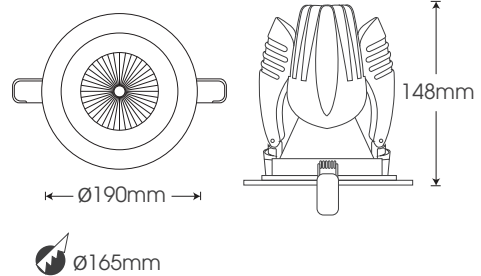


Model	Power	Led source	Beam angle	CCT	CRI	Flux
DL-JW20	20W	CITIZEN (Japan)	73°	3000K	>80	2115lm
					>90	1835lm
				4000K	>80	2265lm
					>90	1920lm
				5000K	>80	2265lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

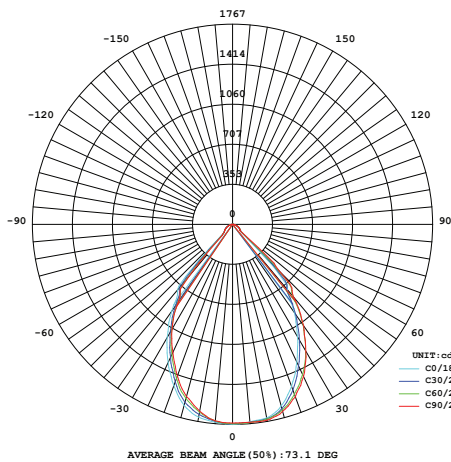

Height	AVR E	CENTER E	Diameter
1.50m	425.301lx	785.561lx	221.73cm
2.00m	239.231lx	441.871lx	295.64cm
4.00m	59.811lx	110.471lx	591.28cm
4.50m	47.261lx	87.281lx	665.19cm
6.00m	26.581lx	49.101lx	886.92cm

Angle: 72.9deg

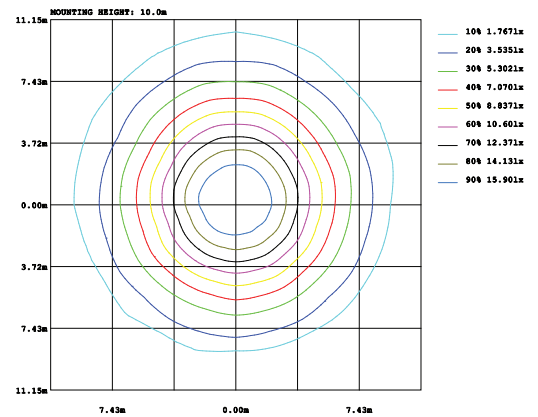

Parameter of DL-JW20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Ceiling cut**

Size cut: Ø165mm
- Connected Led Driver with 220VAC power**
3. Connected Led Driver with lamp

≈ 220VAC → Driver → Jack → Ceiling cut
- Put the lamp on the ceiling**

1 pcs → 220mm x 190mm x 220mm box
 6 pcs → 620mm x 470mm x 240mm shipping box