




## DL-JW20

White



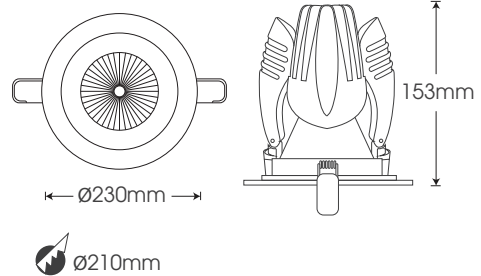


| Model   | Power | Led source      | Beam angle | CCT   | CRI | Flux   |
|---------|-------|-----------------|------------|-------|-----|--------|
| DL-JW40 | 40W   | CITIZEN (Japan) | 76°        | 3000K | >80 | 3615lm |
|         |       |                 |            |       | >90 | 3540lm |
|         |       |                 |            | 4000K | >80 | 3950lm |
|         |       |                 |            |       | >90 | 3720lm |
|         |       |                 |            | 5000K | >80 | 3950lm |

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

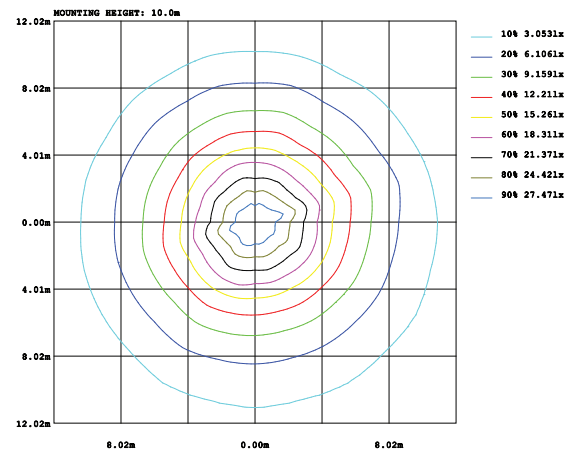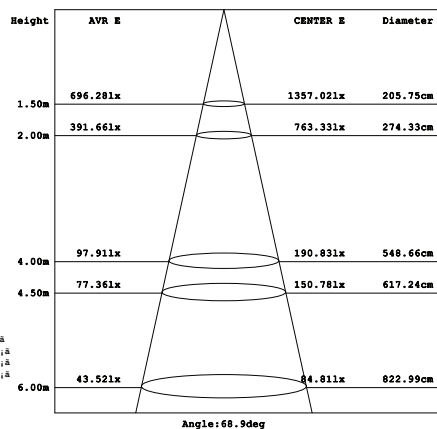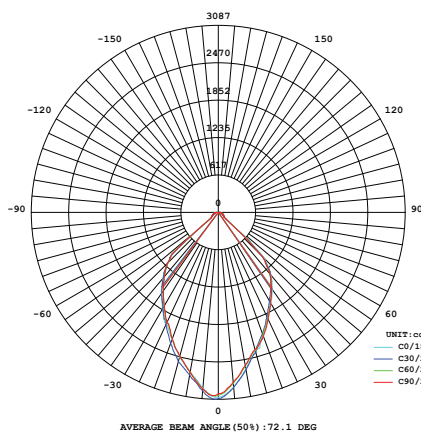

Parameter of DL-JW40 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Ceiling cut**  
  
 Size cut: Ø210mm
- Connected Led Driver with 220VAC power**  
**3. Connected Led Driver with lamp**
- 4. Put the lamp on the ceiling**

### PACKING

1 pcs (individual box): 200mm x 255mm x 255mm

2 pcs (bulk box): 620mm x 470mm x 240mm