



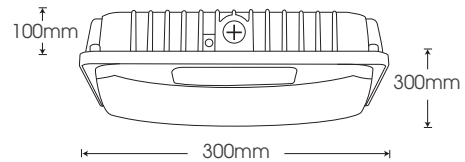

GS-AW60

White



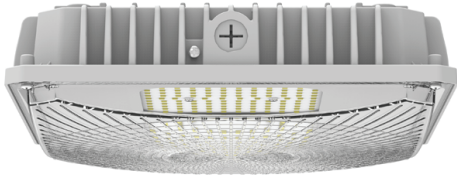


Model	Power	Led source	Beam angle	CCT	CRI	Flux
GS-AW60	60W	Lumileds(USA)/ Cree(USA)*	80°	3000K	>80	6600lm
				4000K	>80	6760lm
				5700K	>80	6760lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

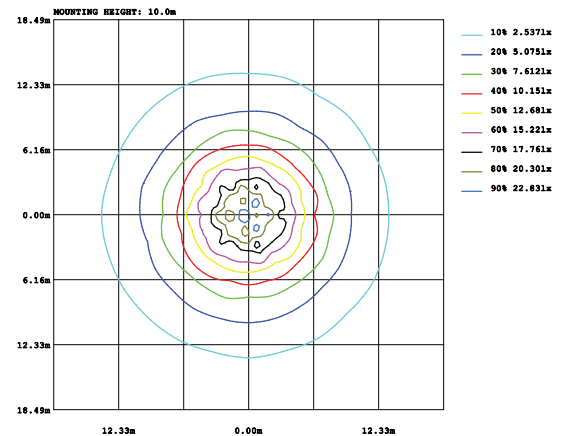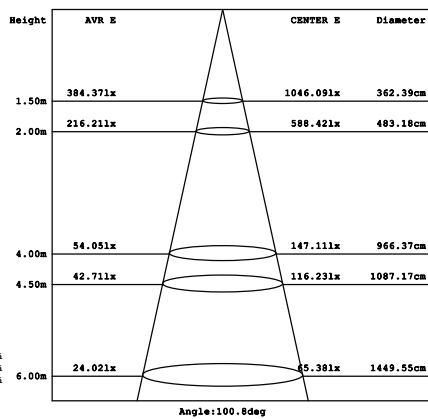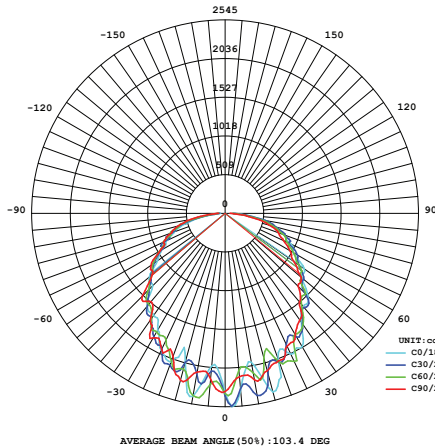

Parameter of GS-AW60 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

