




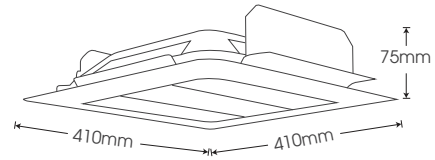

GS-BW60

White



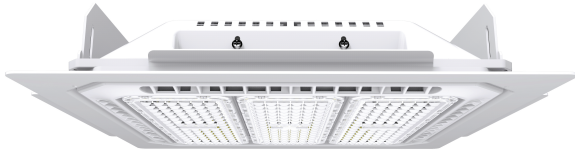


| Model | Power | Led source | Beam angle | CCT | CRI | Flux |
|---------|-------|---------------------------|------------|-------|-----|--------|
| GS-BW60 | 60W | Lumileds(USA)/ Cree(USA)* | 80° | 3000K | >80 | 7410lm |
| | | | | 4000K | >80 | 7620lm |
| | | | | 5700K | >80 | 7620lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

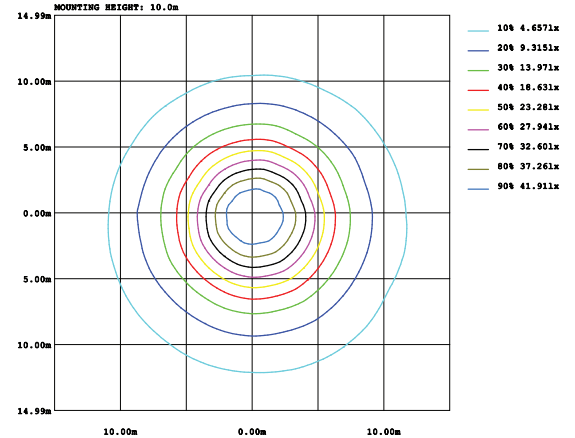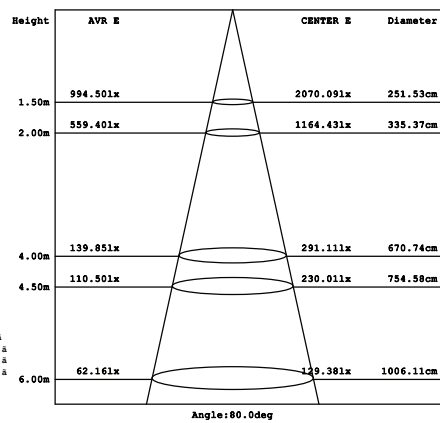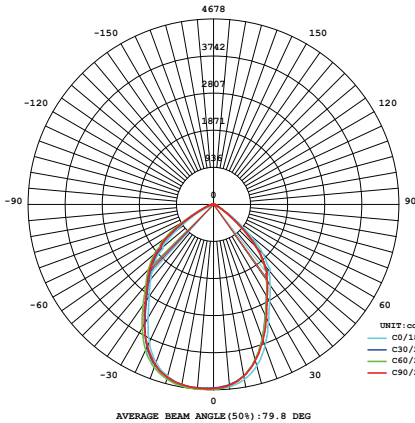

Parameter of GS-BW60 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

