




GS-CW140

White



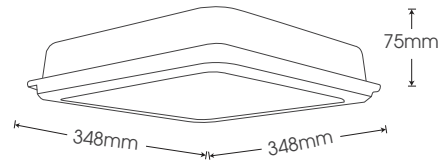


Model	Power	Led source	Beam angle	CCT	CRI	Flux
GS-CW140	140W	Lumileds(USA)/ Cree(USA)*	80°	3000K	>80	15415lm
				4000K	>80	16700lm
				5700K	>80	16700lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

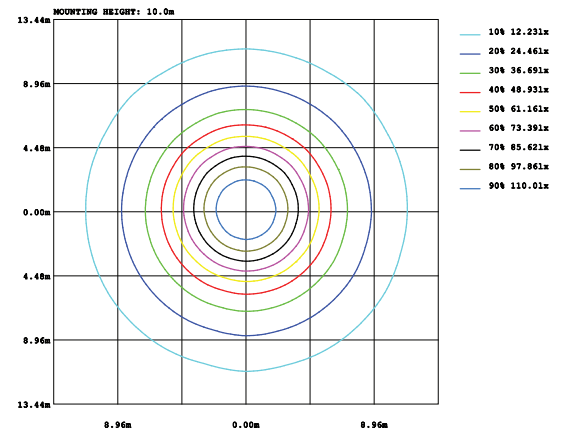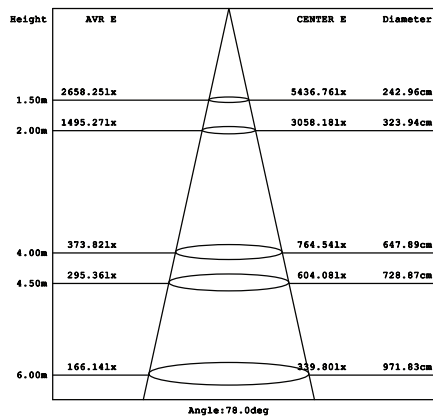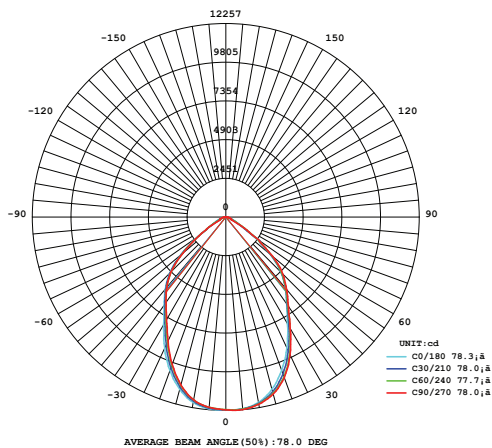

Parameter of GS-CW140 | CCT 3000K

INSTALLATION INSTRUCTIONS

PACKING

- Remove the mounting plate
- Mark the position of the 4 fixing holes and then fix them with screw
- Connect the lamp to the plate
- Install finishing

