




## GS-CW60

White



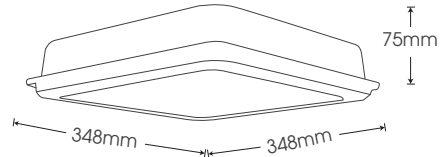


Model	Power	Led source	Beam angle	CCT	CRI	Flux
GS-CW60	60W	Lumileds(USA)/ Cree(USA)*	80°	3000K	>80	7410lm
				4000K	>80	7620lm
				5700K	>80	7620lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

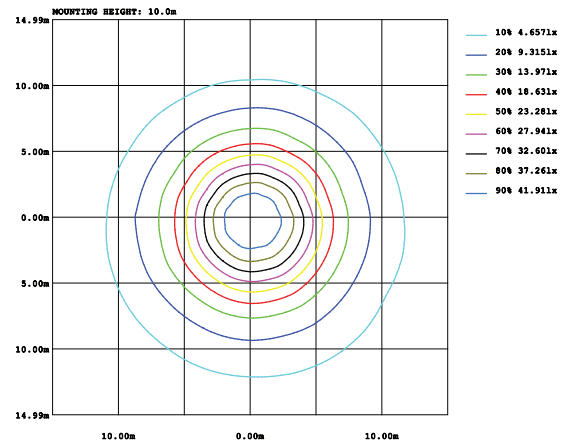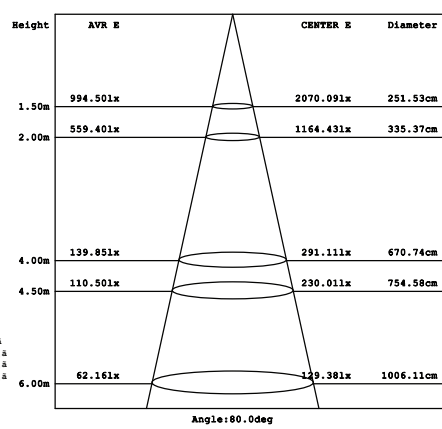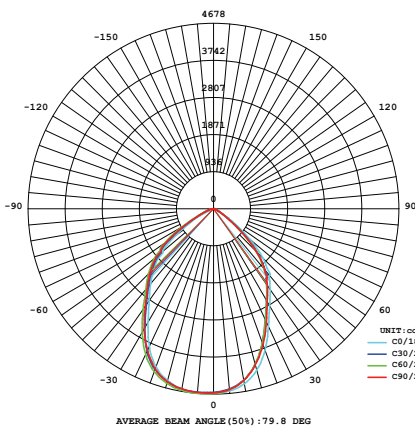

Parameter of GS-CW60 | CCT 4000K

### INSTALLATION INSTRUCTIONS

### PACKING

- Remove the mounting plate
- Mark the position of the 4 fixing holes and then fix them with screw
- Connect the lamp to the plate
- Install finishing