

PL-60120DS80/ PL-60120DW80


☐ White

☒ Silver



3000K 4000K 5000K 6500K

>30.000 Hours 100-240 VAC RoHS CE



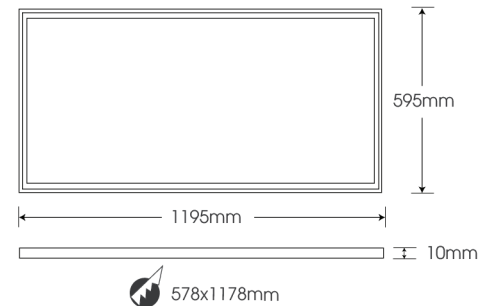


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-60120DS80/ PL-60120DW80	80W	Bridgelux(USA)	120°	3000K	>80	5115lm
				4000K	>80	5690lm
				6500K	>80	5690lm

LAMP PHOTOMETRIC REPORT


AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

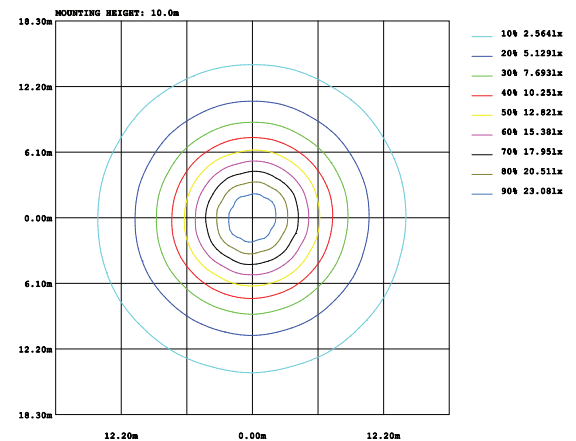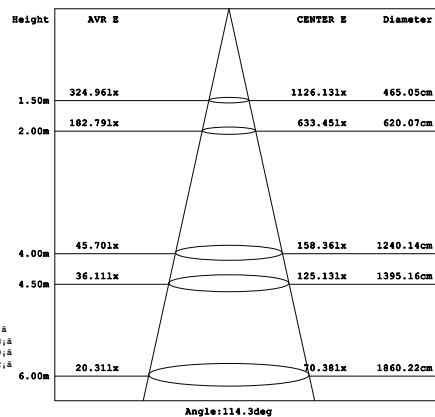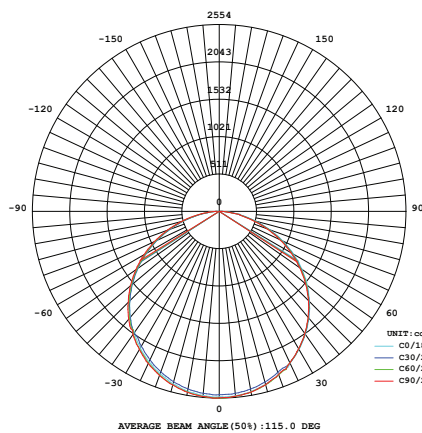


Parameter of PL-60120DS80/ PL-60120DW80 | CCT 4000K

PACKING

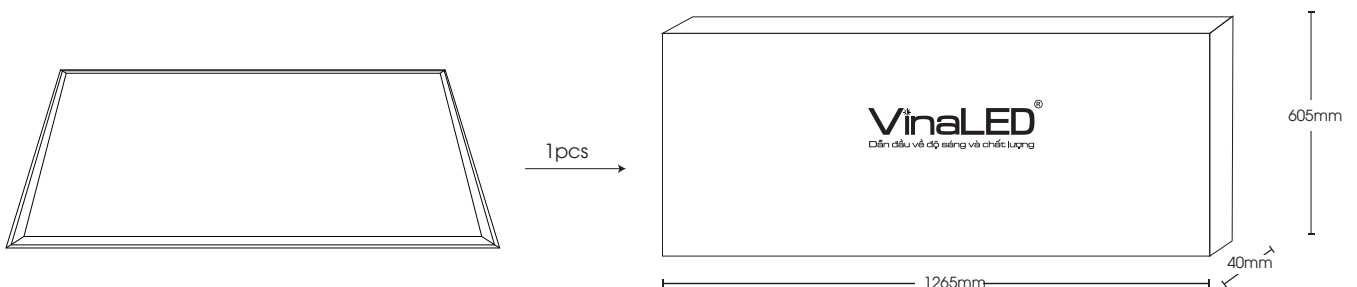


INSTALLATION INSTRUCTIONS

OPTION 1

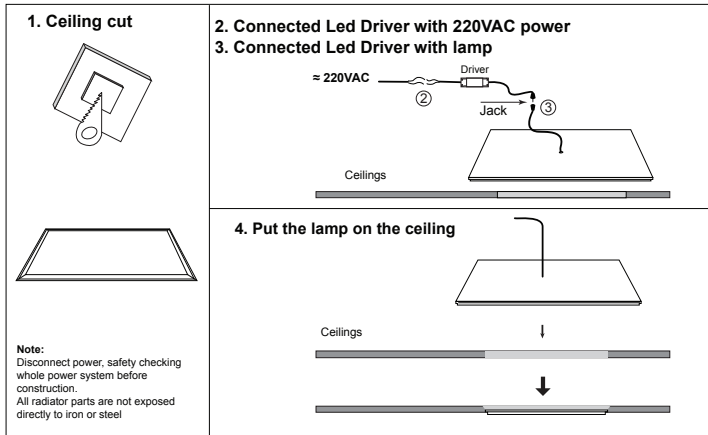

OPTION 2

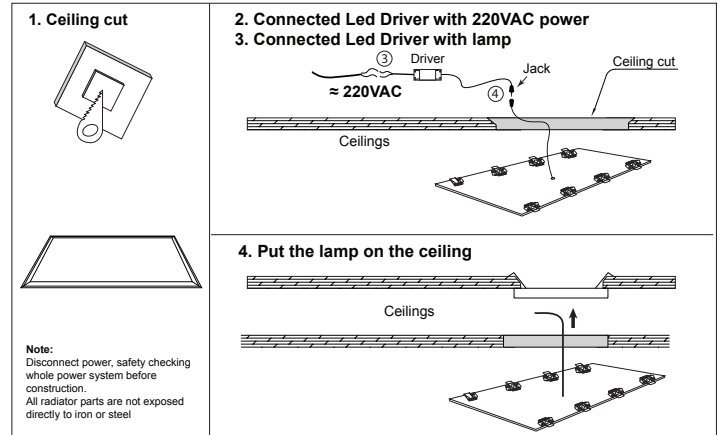

OPTION 3

