


PL-AS18/ PL-AW18

☐ White
☒ Silver



3000K 4000K 5000K 6500K
 >30.000 Hours 220-240 VAC RoHS CE






Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-AS18/ PL-AW18	18W	Bridgelux(USA)	120°	3000K	>80	1275lm
				4000K	>80	1390lm
				6500K	>80	1390lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

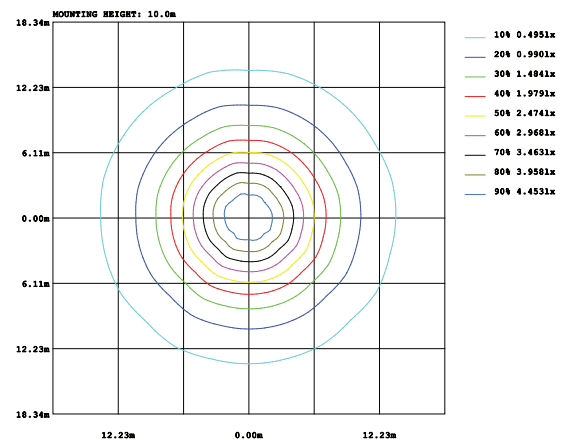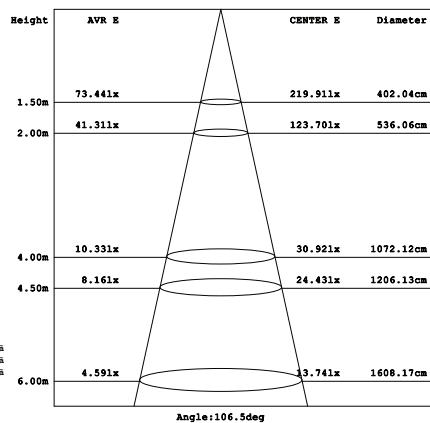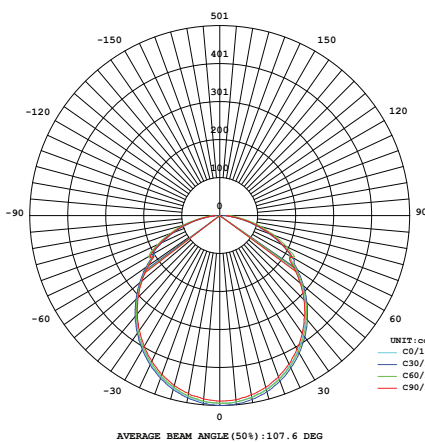

Parameter of PL-AS18/ PL-AW18 | CCT 4000K

INSTALLATION INSTRUCTIONS

1. Ceiling cut

Size cut: Ø227mm

2. Install pat

3. Connected Led Driver with 220VAC power
4. Connected Led Driver with lamp

5. Put the lamp on the ceiling

PACKING