



PL-BS7/ PL-BW7

White
 Silver

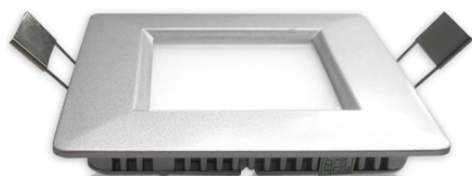

3000K 4000K 5000K 6500K

>30.000 Hours 220-240 VAC RoHS CE



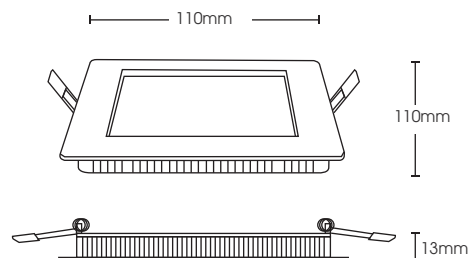


Model	Power	Led source	Beam angle	CCT	CRI	Flux
PL-BS7/ PL-BW7	7W	Bridgelux(USA)	120°	3000K	>80	260lm
				4000K	>80	345lm
				6500K	>80	345lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

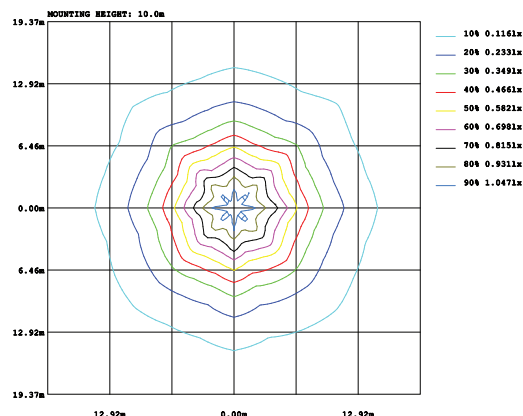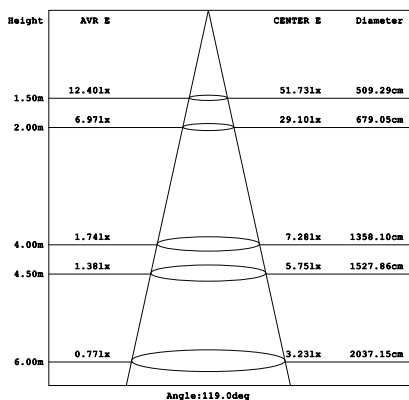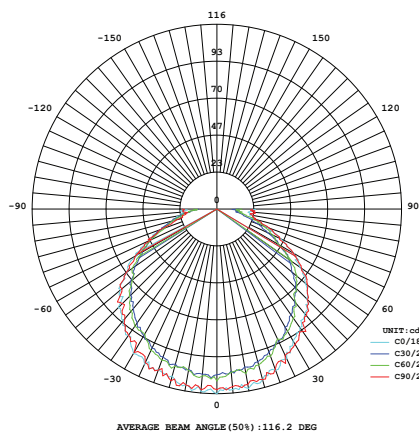

Parameter of PL-BS7/ PL-BW7 | CCT 4000K

INSTALLATION INSTRUCTIONS

1. Ceiling cut

Size cut: 100x100mm

2. Connected Led Driver with 220VAC power
 3. Connected Led Driver with lamp

≈ 220VAC

4. Put the lamp on the ceiling

PACKING

1 pcs

40mm 210mm 155mm

18 pcs

480mm 330mm 320mm

VinaLED®
 Dẫn đầu về độ sáng và chất lượng