


SL-AG540

White

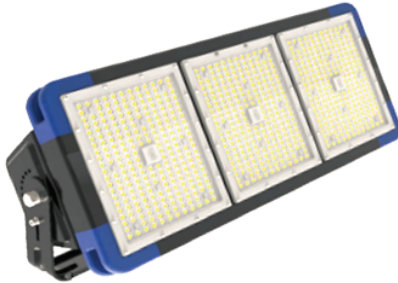

4000K


IP65

>30.000
Hours

100-240
VAC

RoHS

CE



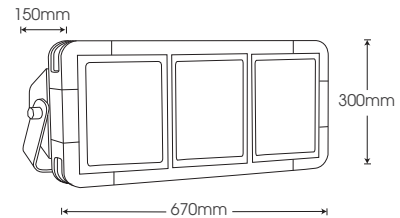


Model	Power	Led source	Beam angle	CCT	CRI	Flux
SL-AG540	540W	Lumileds(USA)/ Cree(USA)*	60°/90°	4000K	>80	12860lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

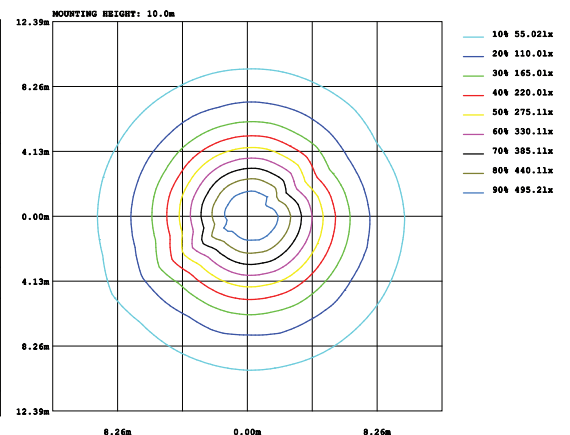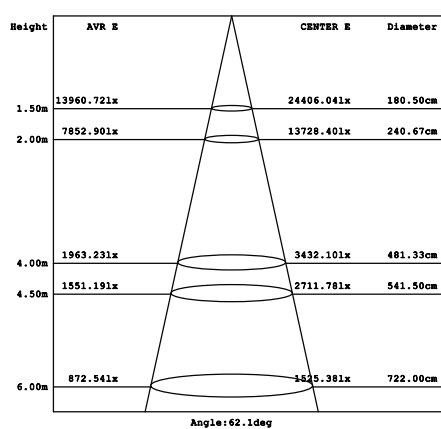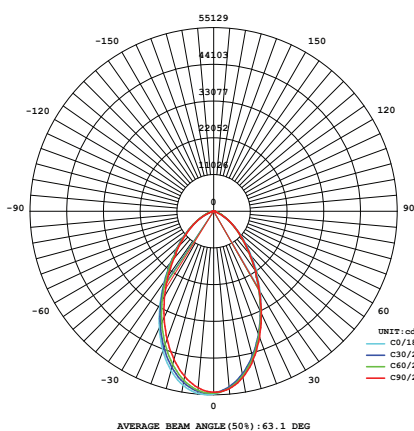

Parameter of SL-AG540 | CCT 3000K

INSTALLATION INSTRUCTIONS

1. Fasten the adjustable bracket with stainless steel screws

2. Mount the light to the wall with screws at the mounting holes on the bracket

3. Connect the main line to power wire of the lamp

4. Adjust the angle of the bracket

PACKING

