


TR-AW7/TR-AB7/TR-AG7

White
 Black

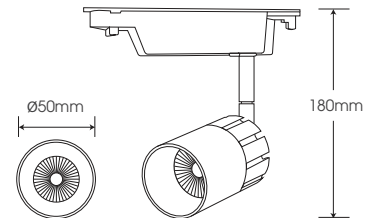

2700K 3000K 3500K 4000K 5000K 5700K

>30,000
Hours

220-240
VAC

RoHS




CE

Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-AW7 TR-AB7 TR-AG7	7W	CREE(USA)	24°/38°	3000K	>80	695lm
					>90	560lm
				4000K	>80	745lm
				5000K	>80	745lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

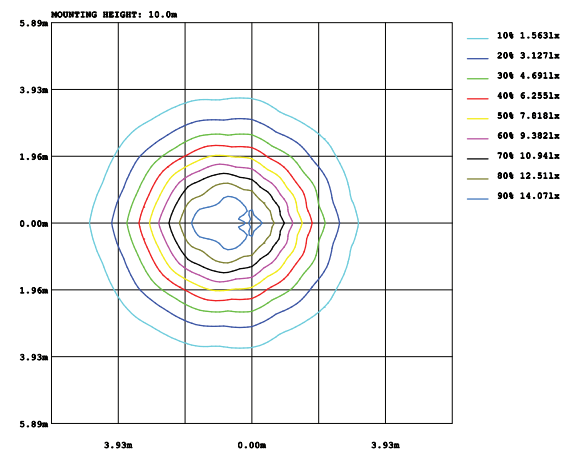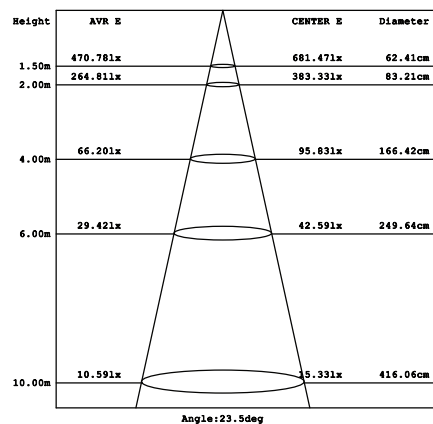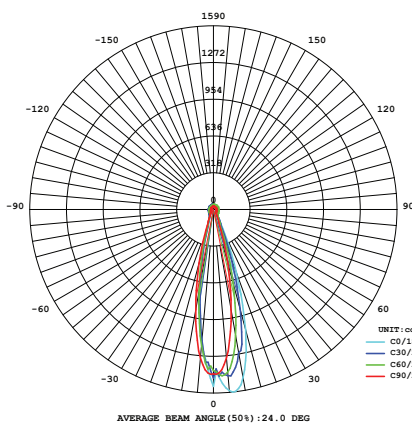

Parameter of TR-AW7/TR-AB7/TR-AG7 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
 Wire connection point
 Bulong
 Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulong along the rails to firmly fixed

3. Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

1 pcs

90mm 155mm 155mm

20 pcs

480mm 330mm 320mm

VinaLED®
 Đèn chiếu sáng công nghiệp và dân dụng