

TR-CW20/TR-CB20

2700K 3000K 3500K 4000K 5000K 5700K


>30.000
Hours

220-240
VAC

RoHS

CE

White
Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-CW20/ TR-CB20	20W	CREE(USA)	24°/38°	3000K	>80	1655lm
					>90	1245lm
				4000K	>80	1850lm
				5000K	>80	1850lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

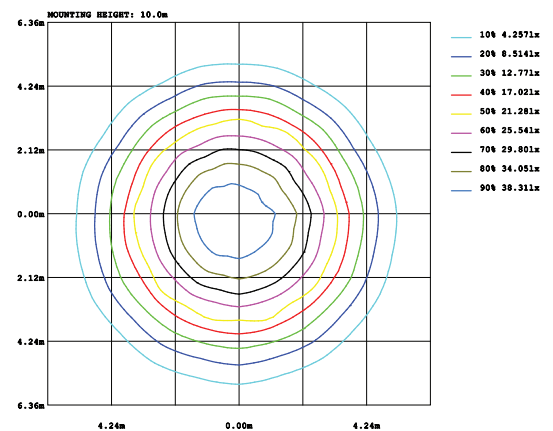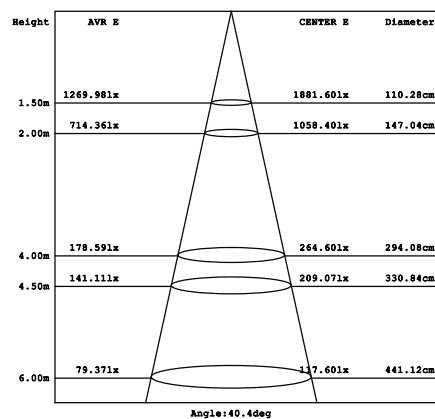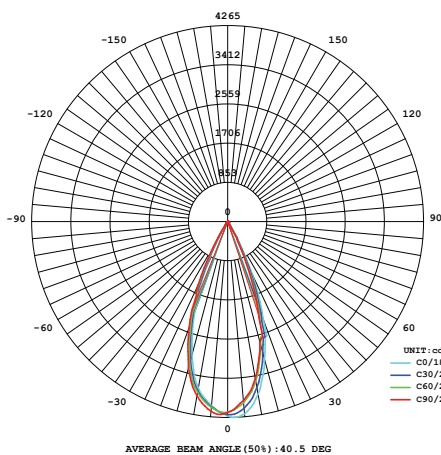

Parameter of TR-CW20/TR-CB20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulging
Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulging along the rails to firmly fixed

3. Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

1 pcs →

280mm

90mm 90mm

VinaLED