


## TR-DW20/TR-DB20

White

Black



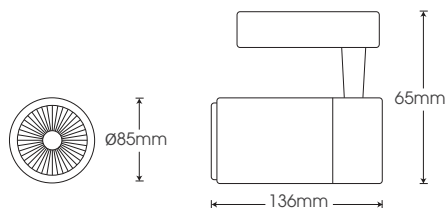


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-DW20/ TR-DB20	20W	CREE (USA)	24°/38°	3000K	>80	2125lm
					>90	1950lm
				4000K	>80	2275lm
					>90	2010lm
				5000K	>80	2275lm

### LAMP PHOTOMETRIC REPORT

### AVERAGE AND CENTER E Figure

### ISOLUX DIAGRAM

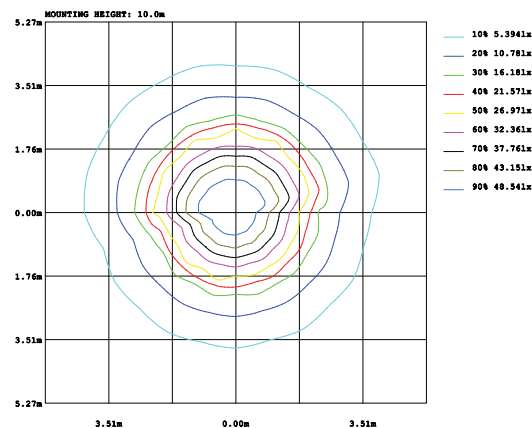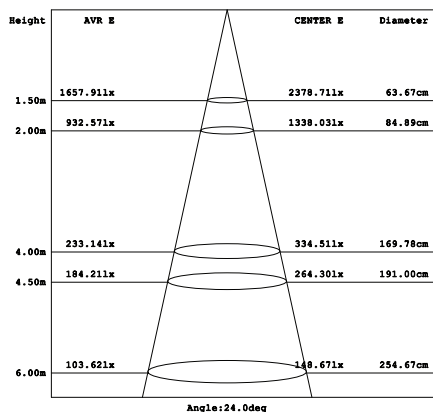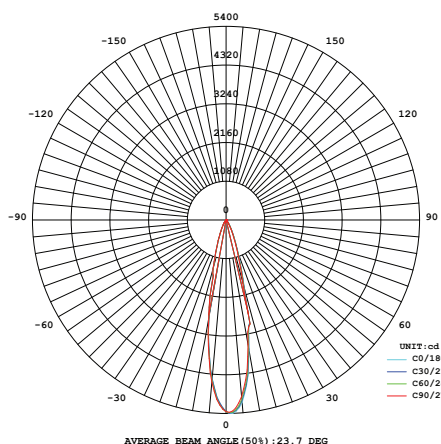

Parameter of TR-DW20/TR-DB20 | CCT 4000K

### INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point**
- Mount the rails on the fixed head**  
  - Always ensure that the rails are parallel to the wall
  - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails**

Note: Disconnect power, safety checking whole power system before construction.  
 All radiator parts are not exposed directly to iron or steel

### PACKING

