

TR-DW25/TR-DB25

2700K 3000K 3500K 4000K 5000K 6500K

>30.000
Hours


220-240
VAC

RoHS

CE

White

Black






Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-DW25/ TR-DB25	25W	CREE (USA)	24°/38°	3000K	>80	2500lm
					>90	2360lm
				4000K	>80	2640lm
					>90	2410lm
				5000K	>80	2640lm
					>90	2410lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

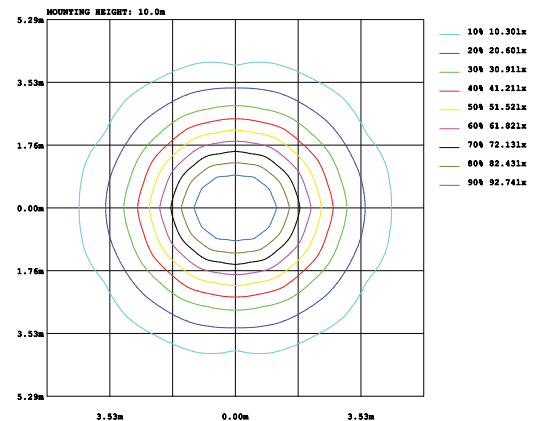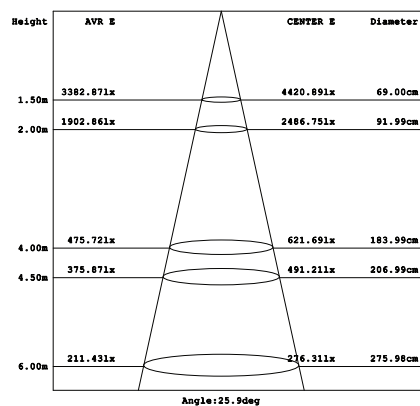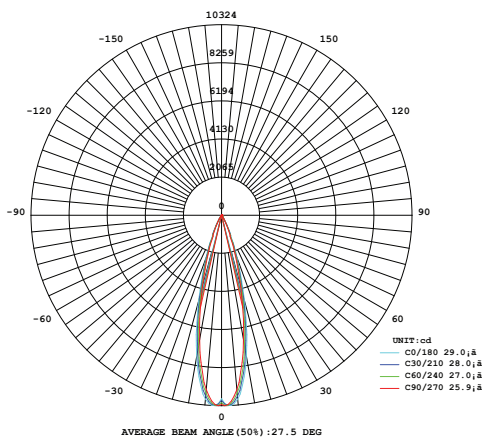

Parameter of TR-DW25/TR-DB25 | CCT 4000K

INSTALLATION INSTRUCTIONS

- Fixed a head on the ceiling, wire connectors with wire connection point.

Ceiling / wiring box
Wire connection point
Bulb
Lid cover the connector box
- Mount the rails on the fixed head.

• Always ensure that the rails are parallel to the wall
• Attach the bulg along the rails to firmly fixed
- Put the lamp on the rails.

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel

PACKING

1 pcs

210mm

120mm

210mm

8 pcs

530mm

310mm

350mm

VinaLED®
Dẫn đầu về độ sáng và chất lượng