


TR-DW30/TR-DB30

White
Black






| Model | Power | Led source | Beam angle | CCT | CRI | Flux |
|---------------------|-------|------------|------------|-------|-----|--------|
| TR-DW30/ TR-DB30 | 30W | CREE (USA) | 24°/38° | 3000K | >80 | 3080lm |
| | | | | | >90 | 2660lm |
| | | | | 4000K | >80 | 3170lm |
| | | | | | >90 | 2740lm |
| | | | | 5000K | >80 | 3170lm |

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

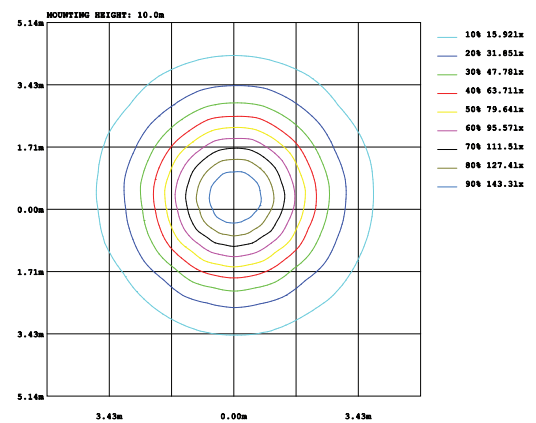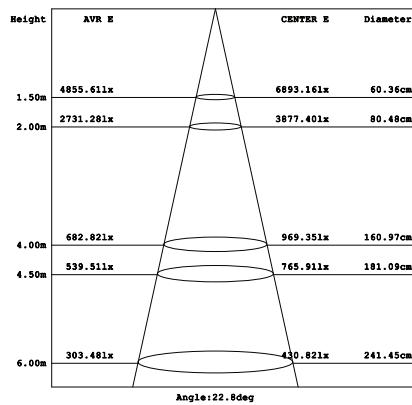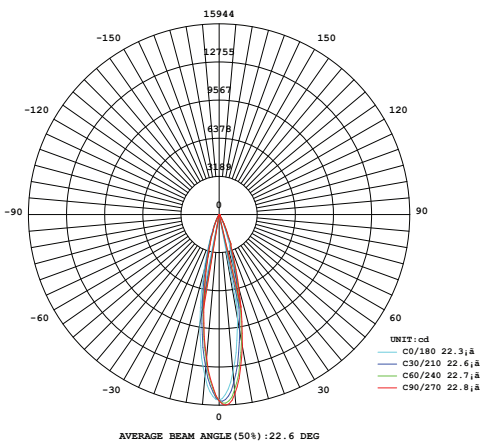

Parameter of TR-DW30/TR-DB30 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

- Fixed a head on the ceiling, wire connectors with wire connection point**
- Mount the rails on the fixed head**
 - Always ensure that the rails are parallel to the wall
 - Attach the bulong along the rails to firmly fixed
- Put the lamp on the rails**

Note: Disconnect power, safety checking whole power system before construction.
All radiator parts are not exposed directly to iron or steel