

TR-EW20/ TR-EB20

2700K 3000K 3500K 4000K 5000K 6500K


>30.000
Hours

220-240
VAC

RoHS

CE

White
Black



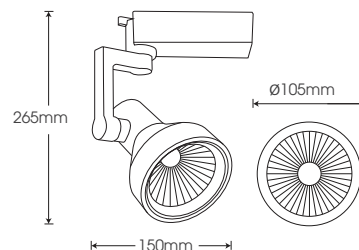


Model	Power	Led source	Beam angle	CCT	CRI	Flux
TR-EW20/ TR-EB20	20W	CREE (USA)	36°	3000K	>80	1845lm
					>90	1615lm
				4000K	>80	1980lm
					>90	1770lm
				5000K	>80	1980lm
					>90	1770lm

LAMP PHOTOMETRIC REPORT

AVERAGE AND CENTER E Figure

ISOLUX DIAGRAM

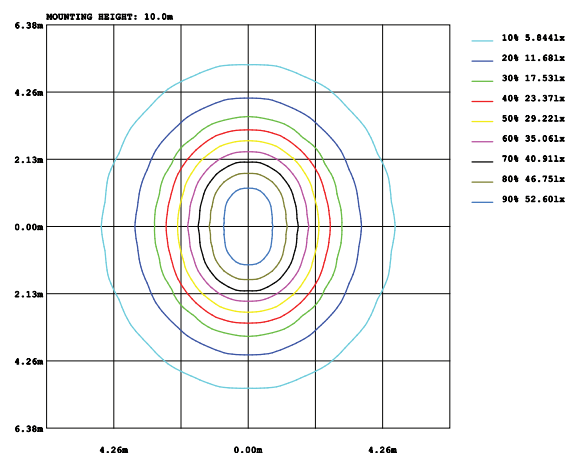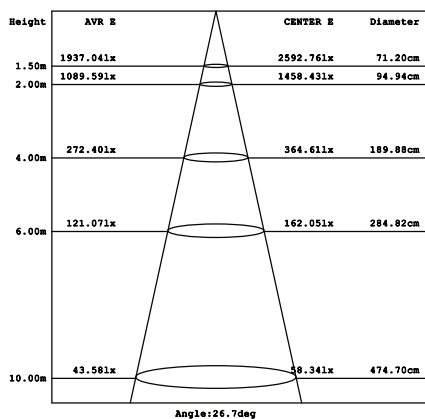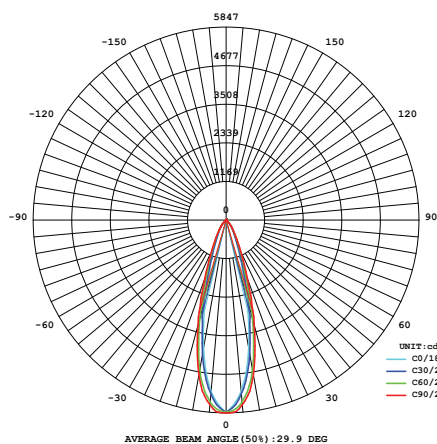

Parameter of TR-EW20/TR-EB20 | CCT 4000K

INSTALLATION INSTRUCTIONS

PACKING

1. Fixed a head on the ceiling, wire connectors with wire connection point

Ceiling / wiring box
Wire connection point
Bulung
Lid cover the connector box

2. Mount the rails on the fixed head

- Always ensure that the rails are parallel to the wall
- Attach the bulong along the rails to firmly fixed

3. Put the lamp on the rails

Note: Disconnect power, safety checking whole power system before construction.
 All radiator parts are not exposed directly to iron or steel

1 pcs
 5 pcs

120mm 210mm 210mm

250mm 370mm 470mm

VinaLED®
 Dẫn đầu về độ sáng và chất lượng